



1 Photo

The photographs below show the top and bottom views of the PMP8790 Rev B demo board. The circuit is built on a PMP8790 Rev A PWB.

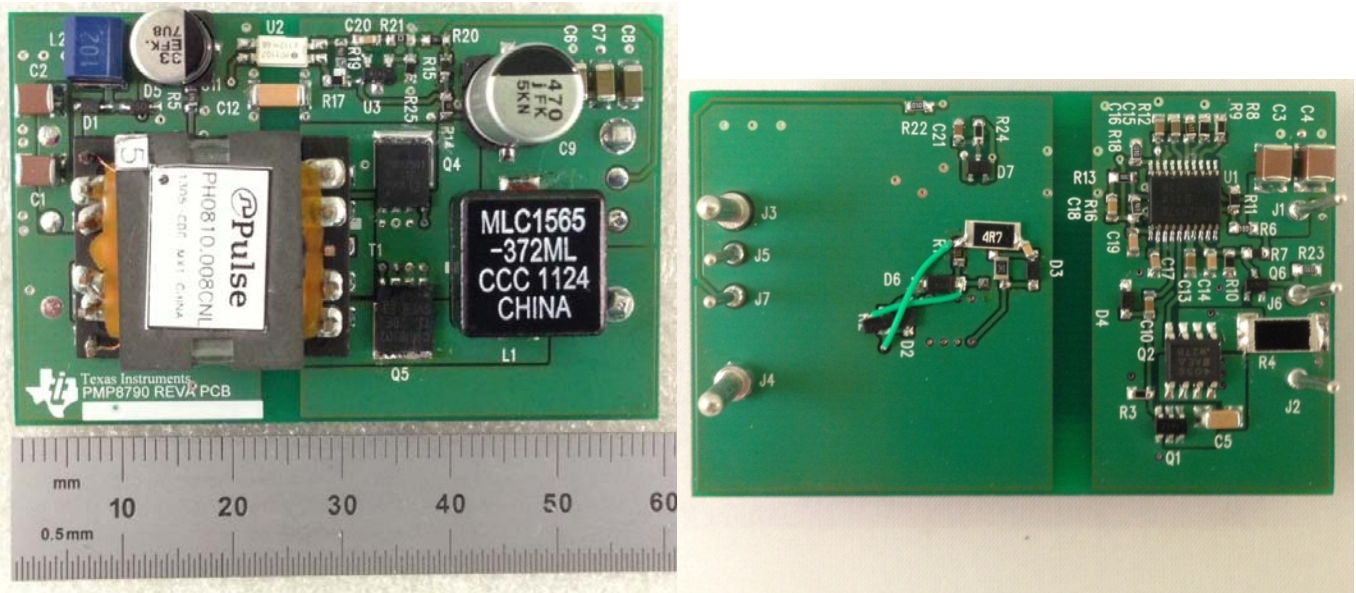

2 Efficiency

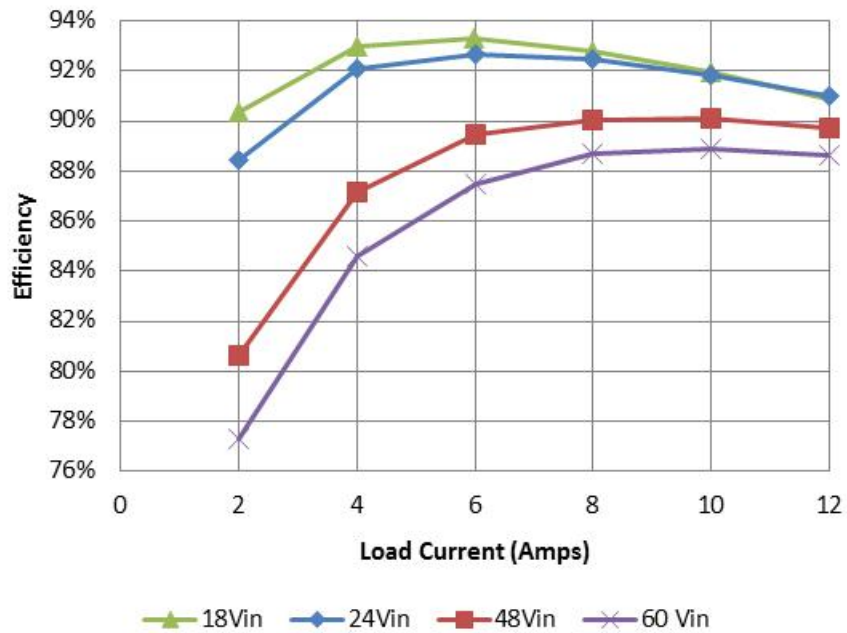

Iout	Vout	Vin	Iin	Pout	Losses	Efficiency
0.000	3.316	18.0	0.033	0.00	0.594	0.0%
2.001	3.315	18.0	0.408	6.63	0.711	90.3%
4.000	3.314	18.0	0.792	13.26	1.000	93.0%
5.996	3.313	18.0	1.183	19.86	1.429	93.3%
8.00	3.312	18.0	1.587	26.50	2.070	92.8%
10.00	3.311	18.0	2.001	33.11	2.908	91.9%
12.01	3.310	18.0	2.430	39.75	3.987	90.9%

Iout	Vout	Vin	Iin	Pout	Losses	Efficiency
0.000	3.315	24.0	0.029	0.00	0.696	0.0%
2.004	3.314	24.0	0.313	6.64	0.871	88.4%
4.007	3.314	24.0	0.601	13.28	1.145	92.1%
6.000	3.313	24.0	0.894	19.88	1.578	92.6%
8.00	3.312	24.0	1.194	26.50	2.160	92.5%
10.00	3.311	24.0	1.502	33.11	2.938	91.8%
12.00	3.310	24.0	1.819	39.72	3.936	91.0%


Iout	Vout	Vin	Iin	Pout	Losses	Efficiency
0.000	3.316	48.0	0.024	0.00	1.152	0.0%
1.997	3.315	48.0	0.171	6.62	1.588	80.7%
4.001	3.314	48.0	0.317	13.26	1.957	87.1%
6.002	3.313	48.0	0.463	19.88	2.339	89.5%
8.00	3.312	48.0	0.613	26.50	2.928	90.0%
10.00	3.312	48.0	0.766	33.12	3.648	90.1%
12.00	3.311	48.0	0.923	39.73	4.572	89.7%

Iout	Vout	Vin	Iin	Pout	Losses	Efficiency
0.000	3.317	60.0	0.023	0.00	1.380	0.0%
2.001	3.315	60.0	0.143	6.63	1.947	77.3%
3.998	3.314	60.0	0.261	13.25	2.411	84.6%
6.002	3.314	60.0	0.379	19.89	2.849	87.5%
8.00	3.313	60.0	0.498	26.50	3.376	88.7%
10.00	3.312	60.0	0.621	33.12	4.140	88.9%
12.00	3.311	60.0	0.747	39.73	5.088	88.6%



3 Thermal Images

The ambient temperature was 25C with no forced air flow. The output was loaded with 12A.


3.1 24V Input

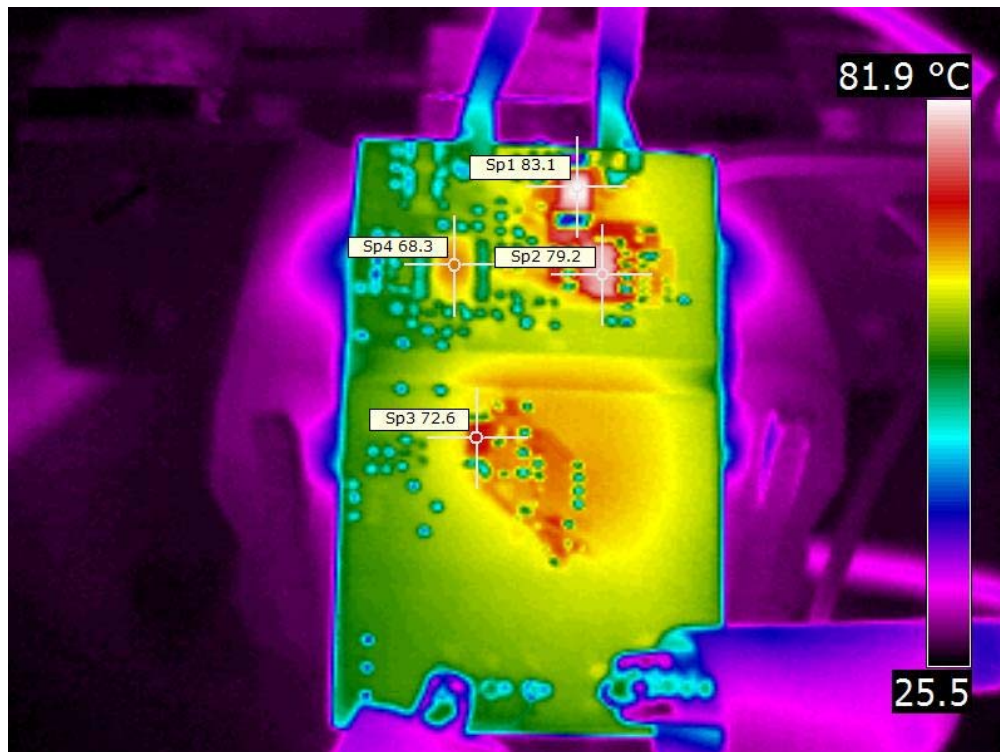


3.2 48V Input

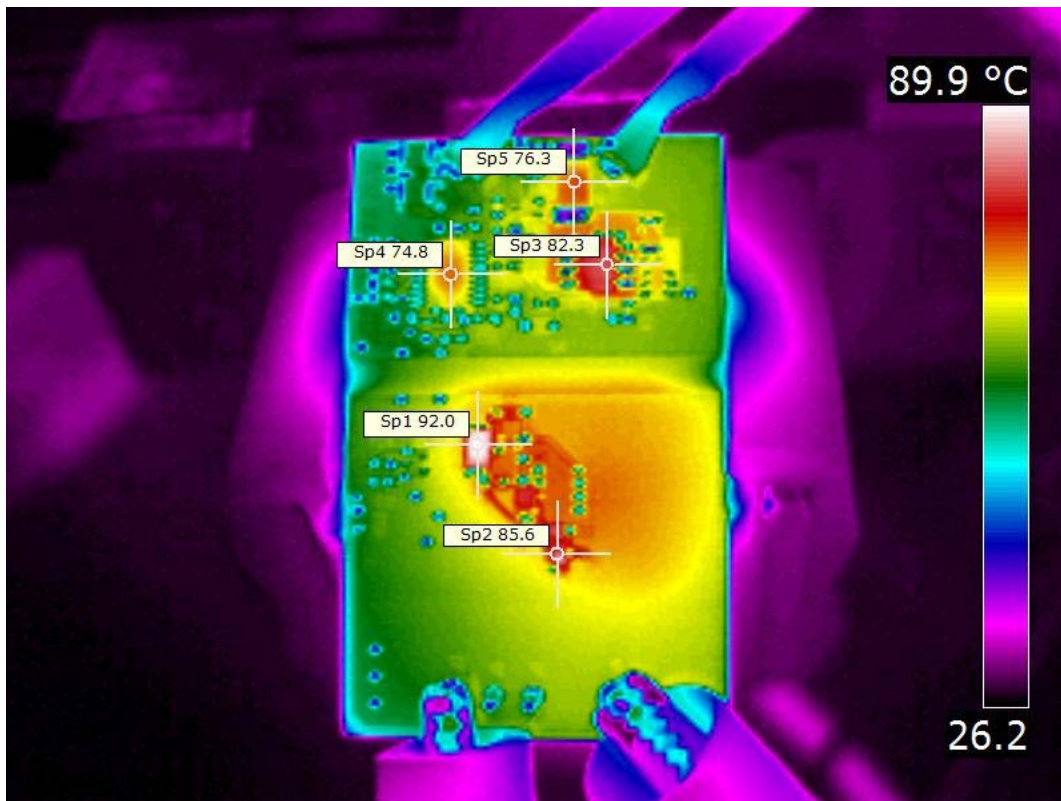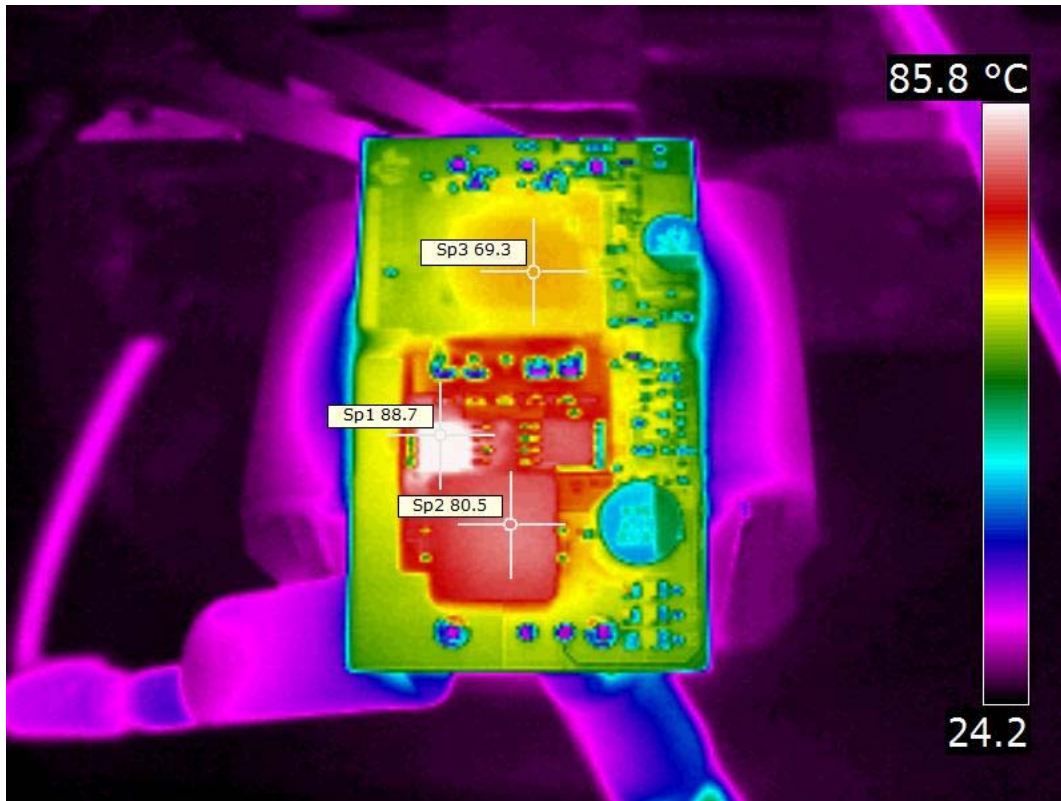


4 Startup – 18V Input, No Load

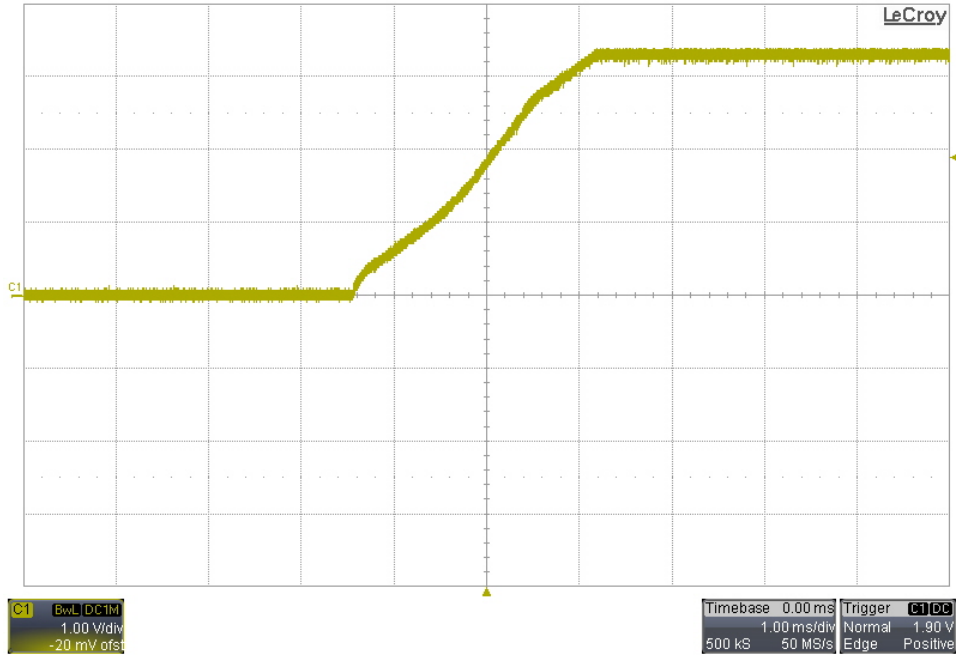


5 Startup – 60V Input, No Load

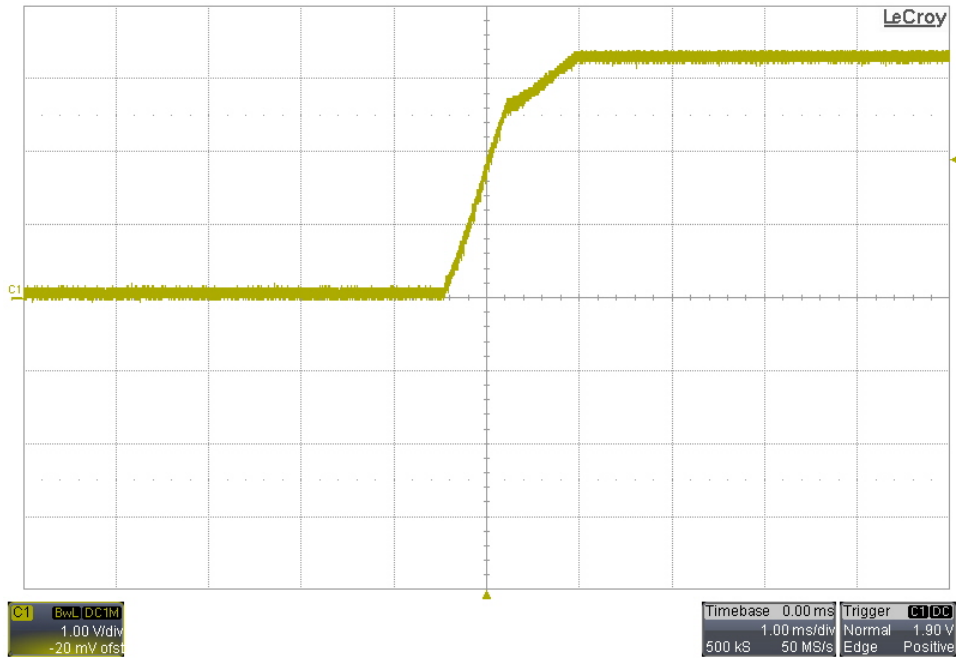

6 Startup – 18V Input, 0.3Ω Load

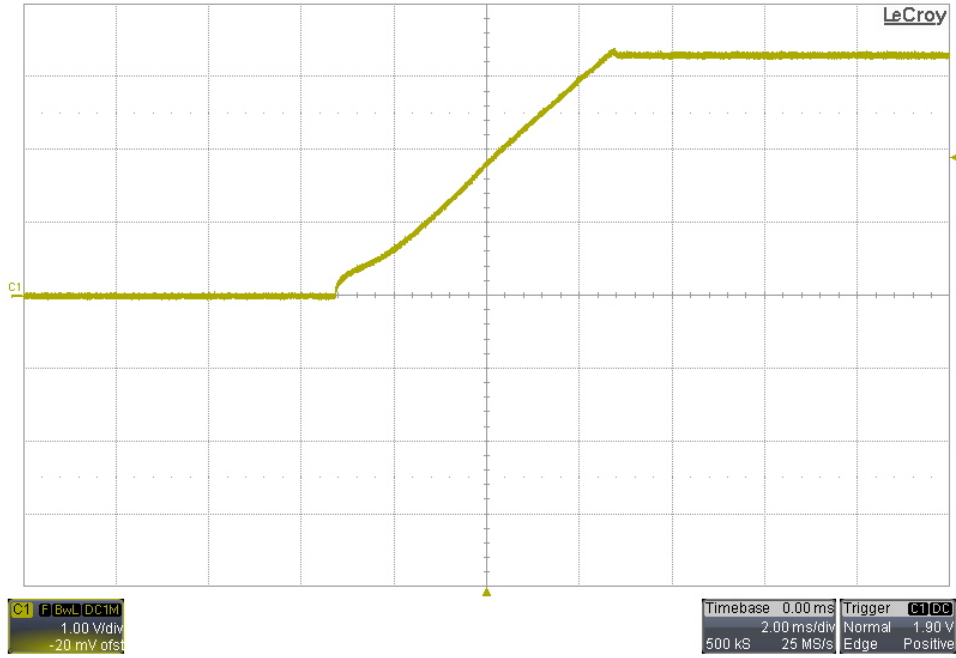


7 Startup – 60V Input, 0.3Ω Load

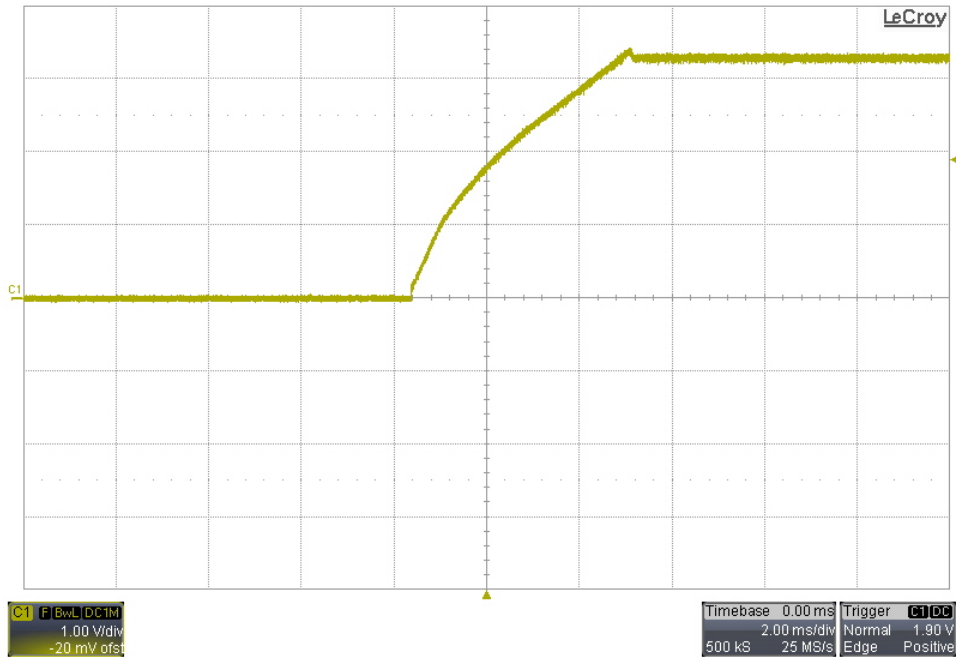


8 Output Ripple Voltage

The output ripple voltage is shown in the plots below. The output was loaded with 12A.

8.1 18V Input

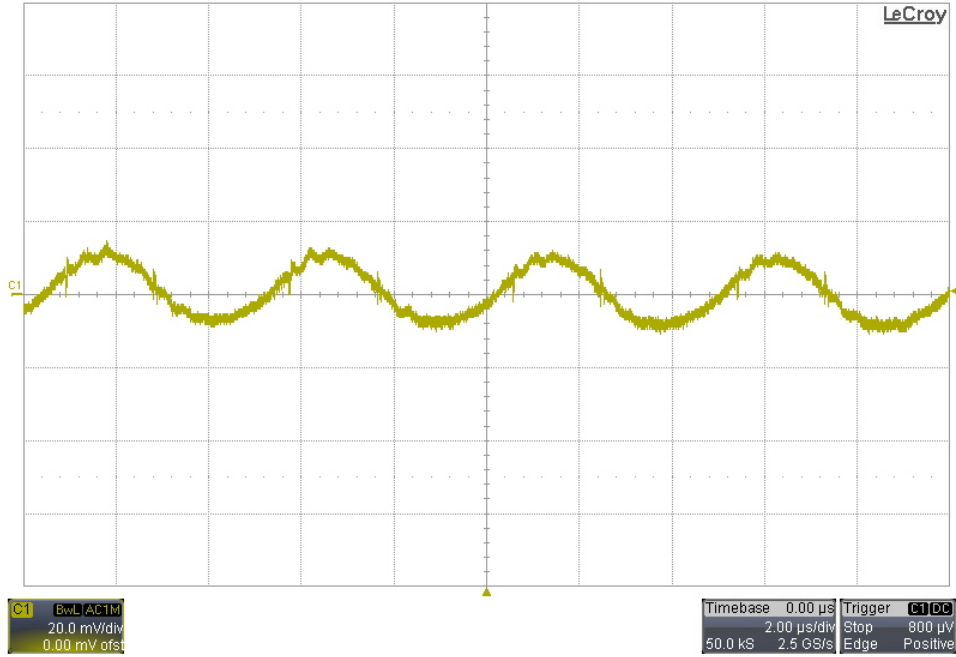


8.2 60V Input

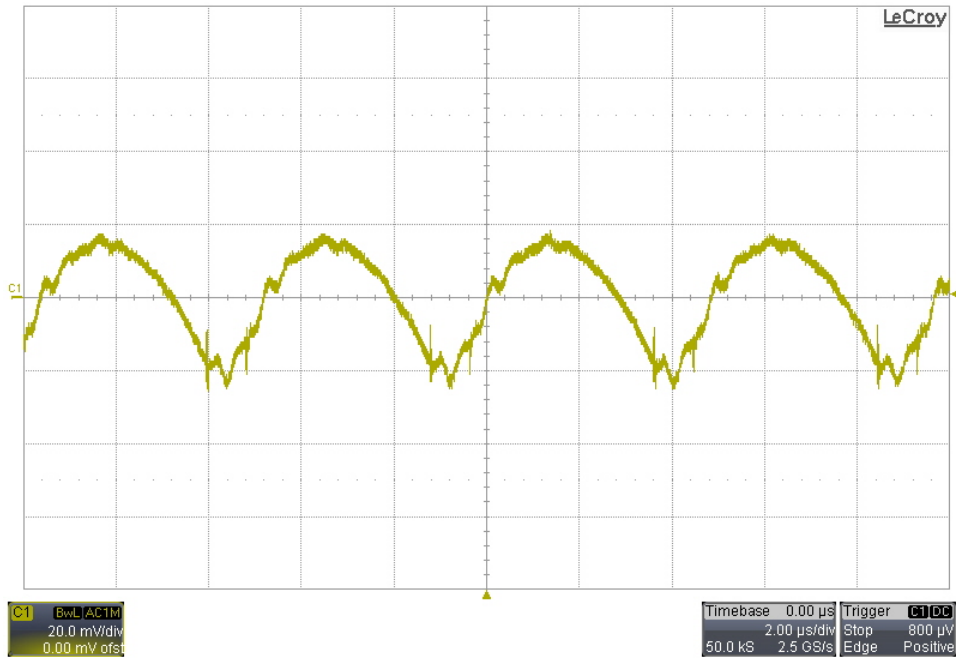


9 Frequency Response

The frequency response of the feedback loop is shown below. For the gain/phase plot #1, the input was set to 18V. For the gain/phase plot #2, the input was set to 60V. The output was loaded with 12A.

9.1 Measured Across R14

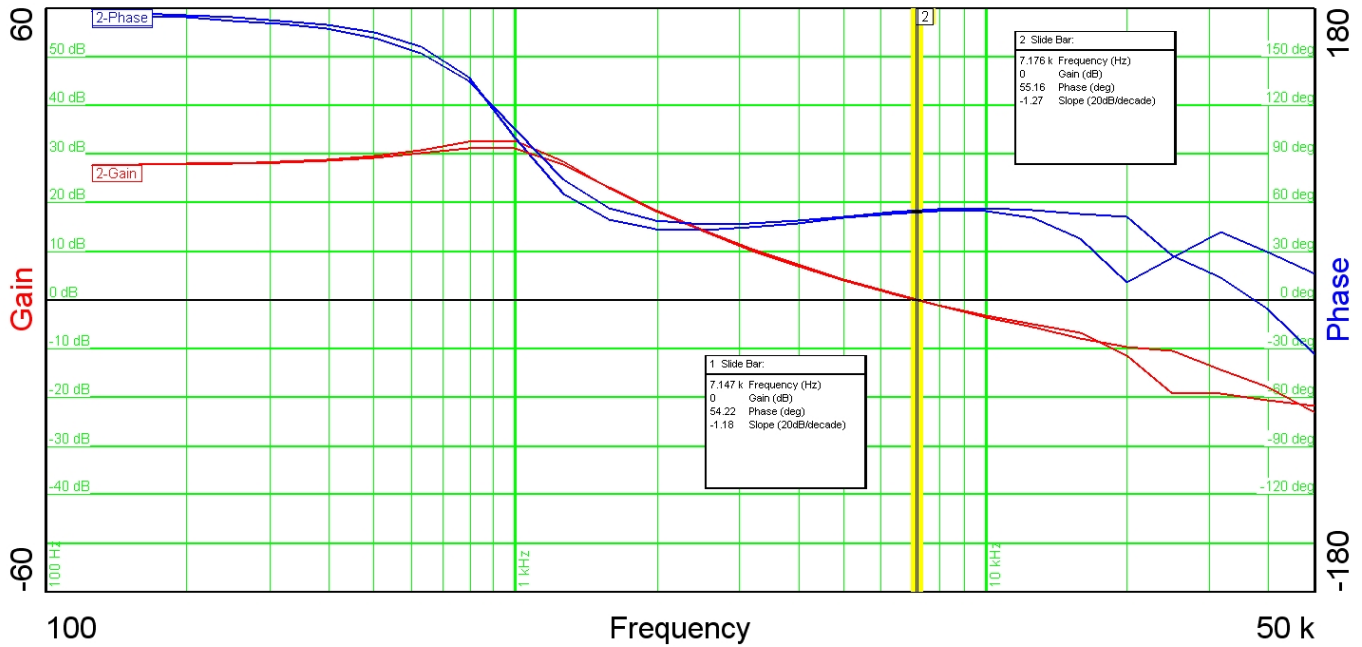


9.2 Measured Across R15

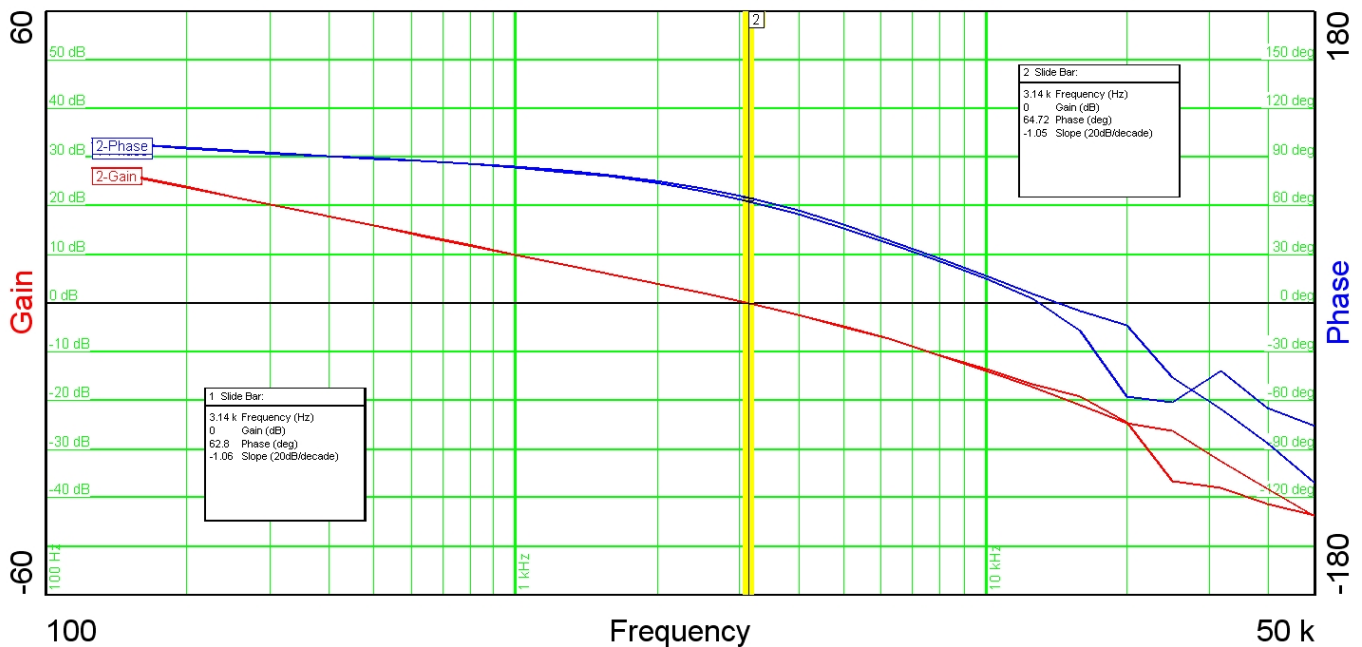


10 Load Transients

The response to a load step from 6A to 12A is shown in the images below. Channel 1: Vout (ac coupled); Channel 4: Iout

10.1 18V Input

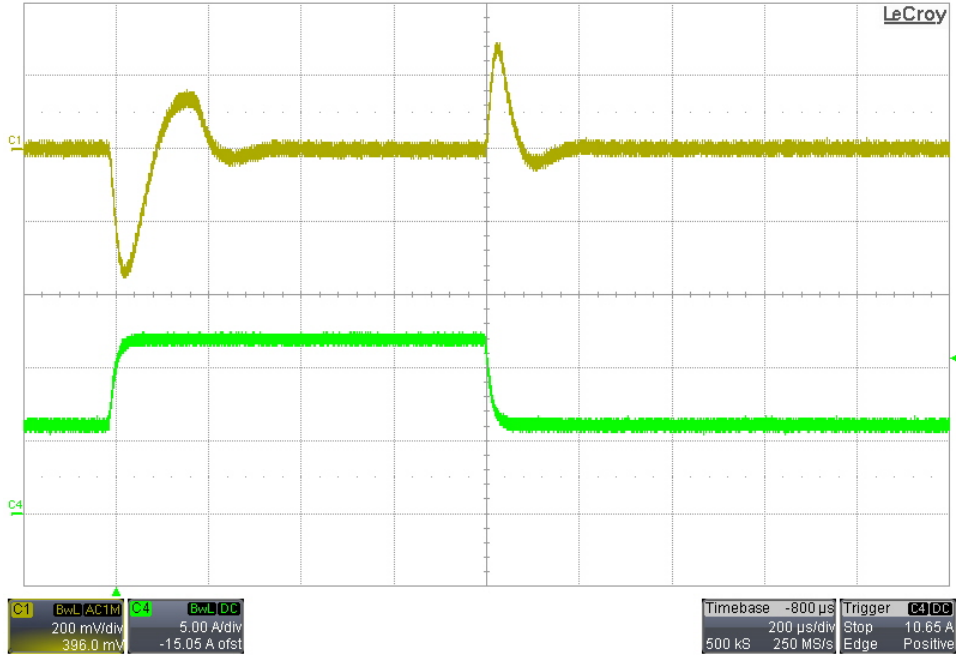

10.2 60V Input

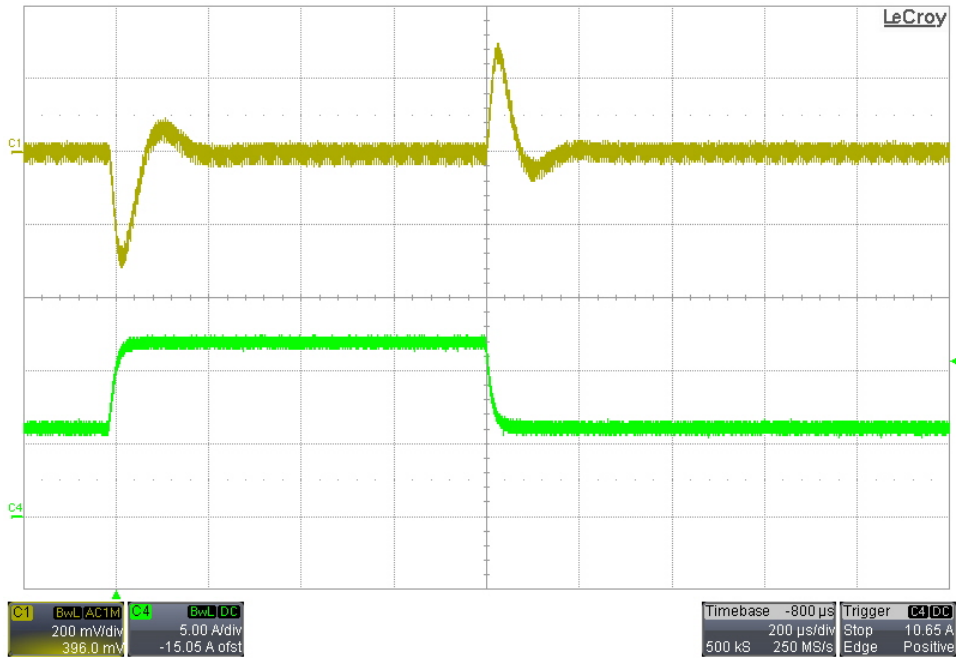

11 Input Under-Voltage Lock-Out


The turn-on and turn-off input voltages were measured and recorded below.

Turn-On	17.3 V
Turn-Off	17.0 V

12 Switching Waveforms


For the images below show the output was loaded with 12A.

12.1 Primary FET (Q2) Vds – 60V Input

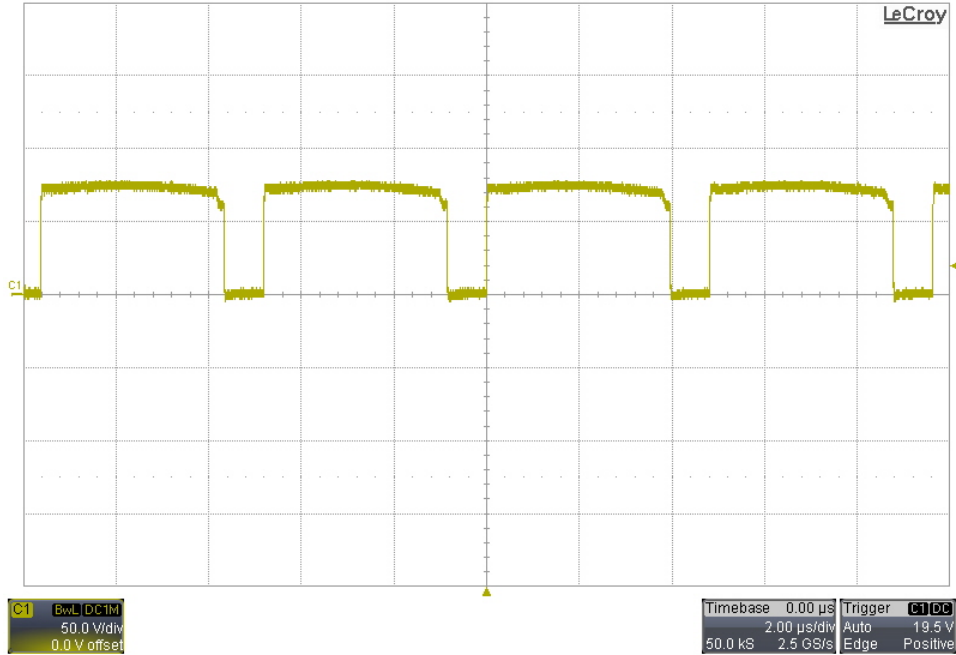


12.2 Q4 & Q5 Synchronous FETs – 18V Input

Channel 1 – Q5 Vds; Channel 2 – Q4 Vds

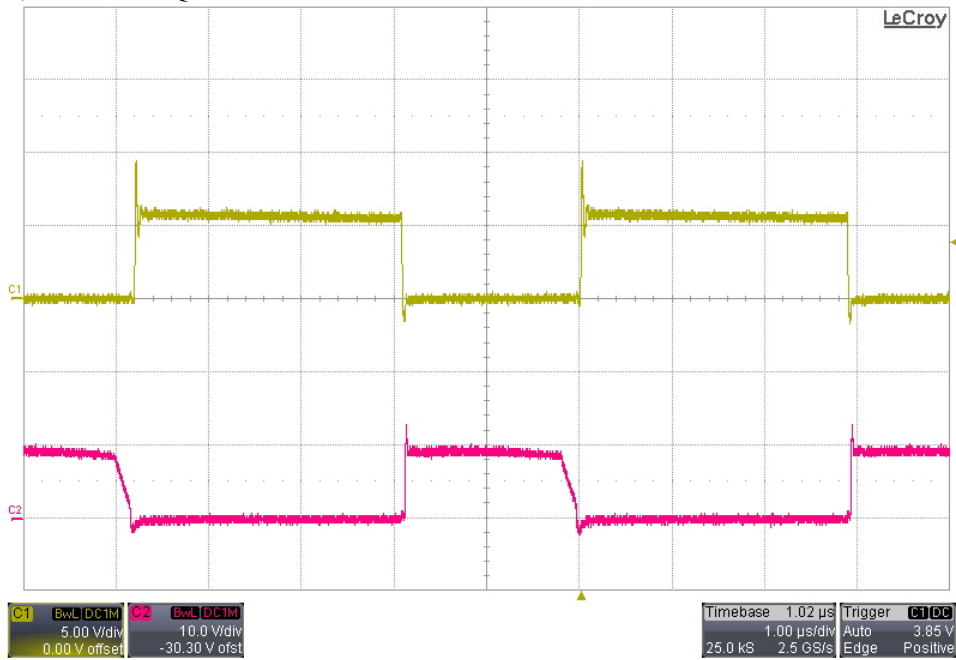

12.3 Q4 & Q5 Synchronous FETs – 60V Input

Channel 1 – Q5 Vds; Channel 2 – Q4 Vds

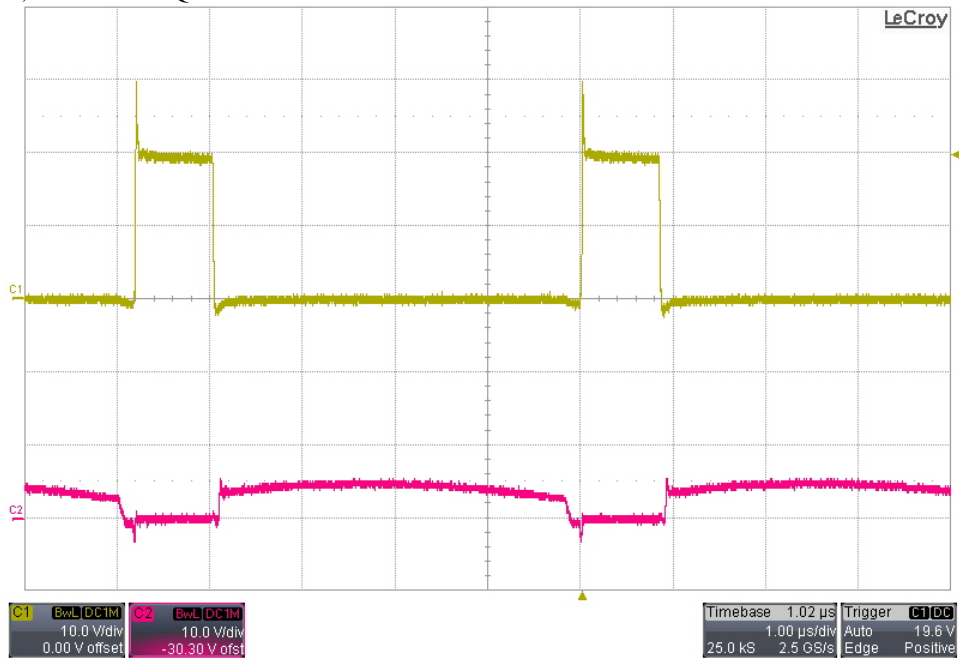

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated