

PMP11399 APEC Board

Test Results


TEXAS INSTRUMENTS

3/1/2016


The PMP11399 board was developed for demonstration purposes at APEC. It is used in conjunction with TI's Fusion Power GUI and the PMBUS interface for control. The following measurements were taken with an input voltage of 12V.

1 Startup, No load


1.1 TPS548D22: 5V

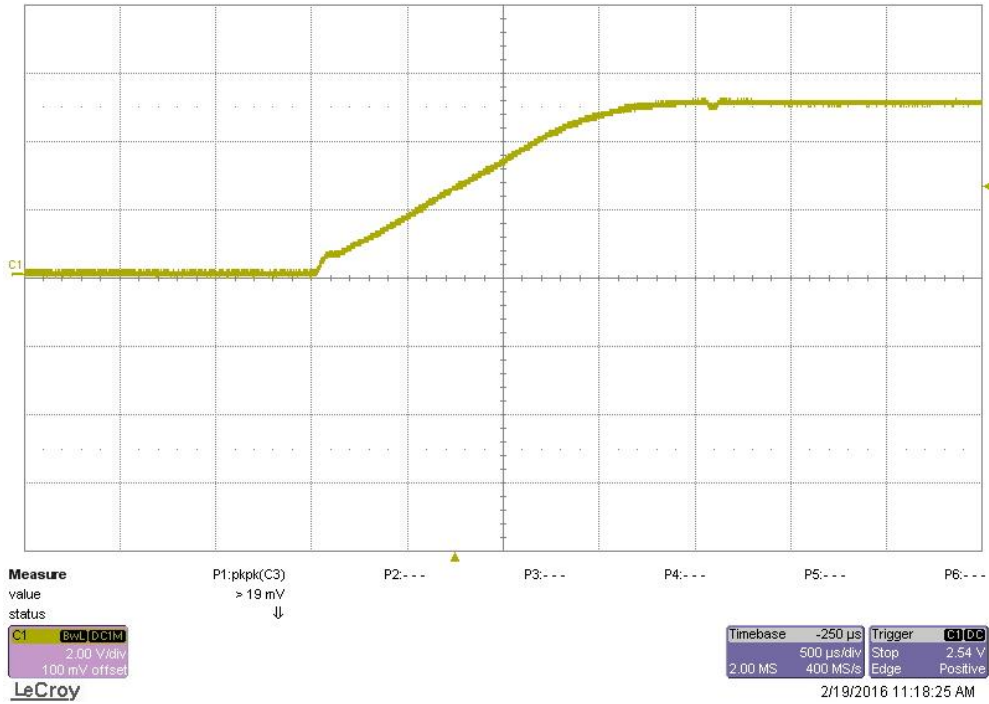


1.2 TPS549A20: 3.3V

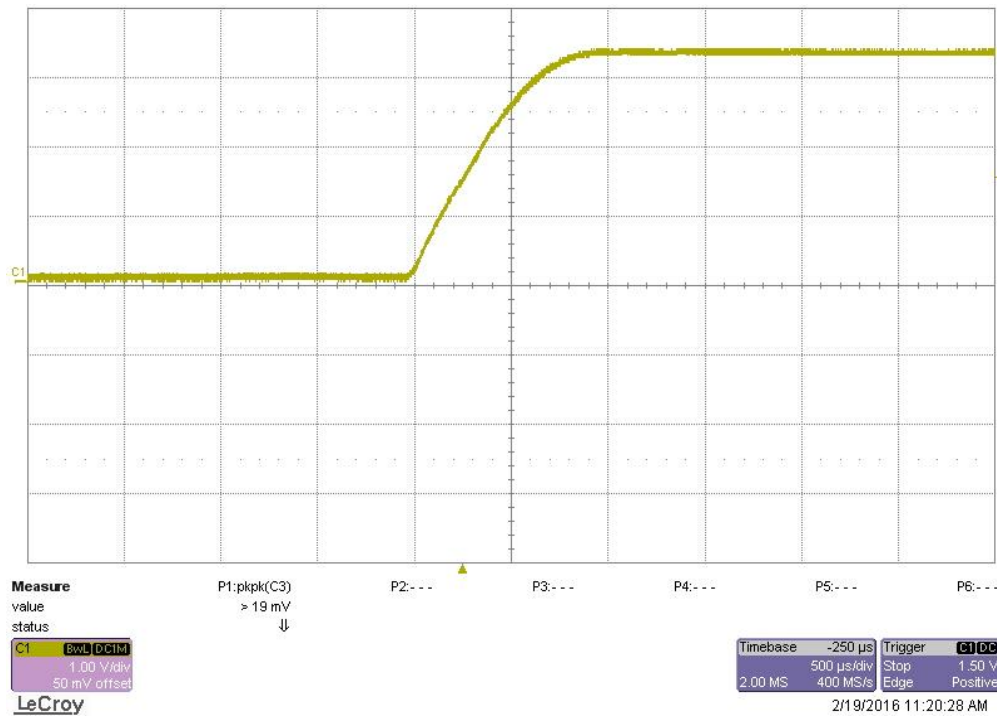


1.3 TPS53513: 1.5V

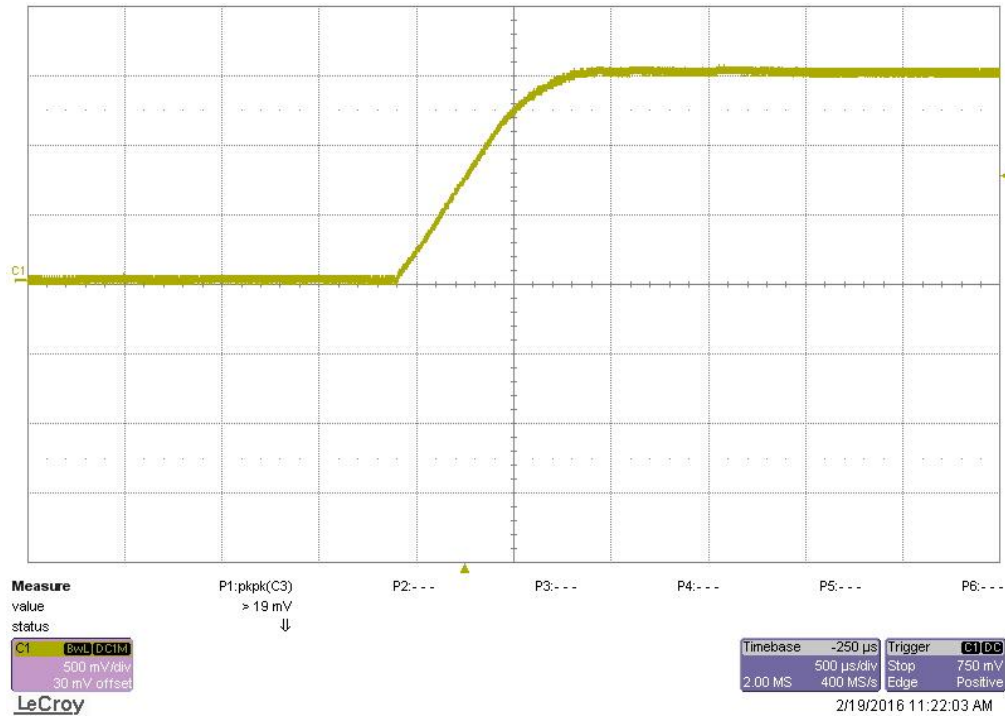


1.4 TPS53515: 1.2V

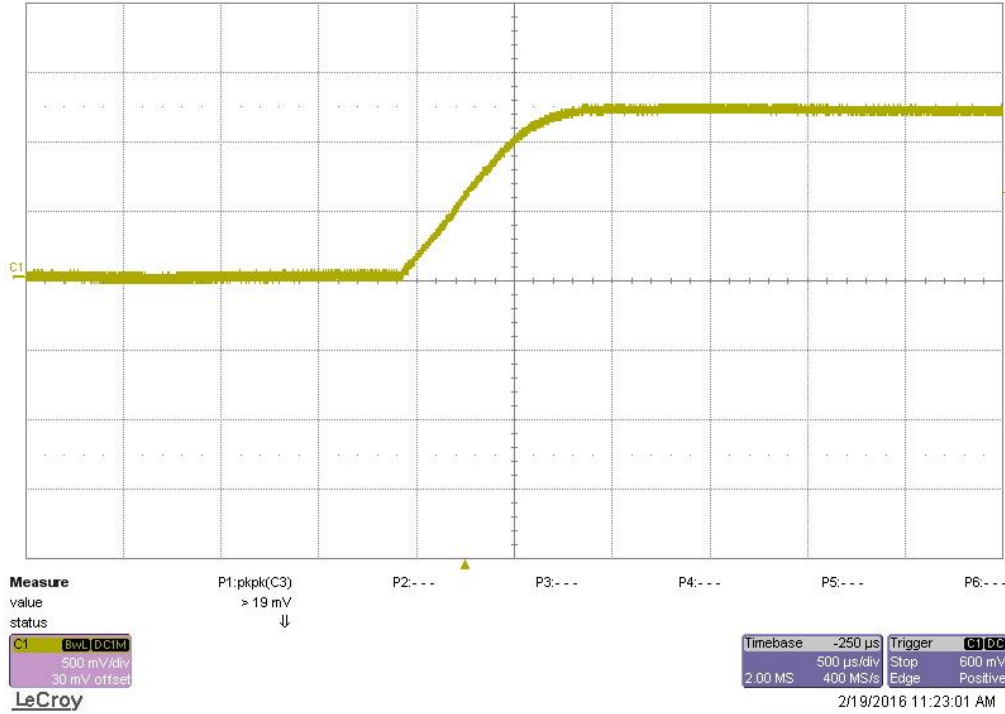


1.5 TPS544C25: 1V

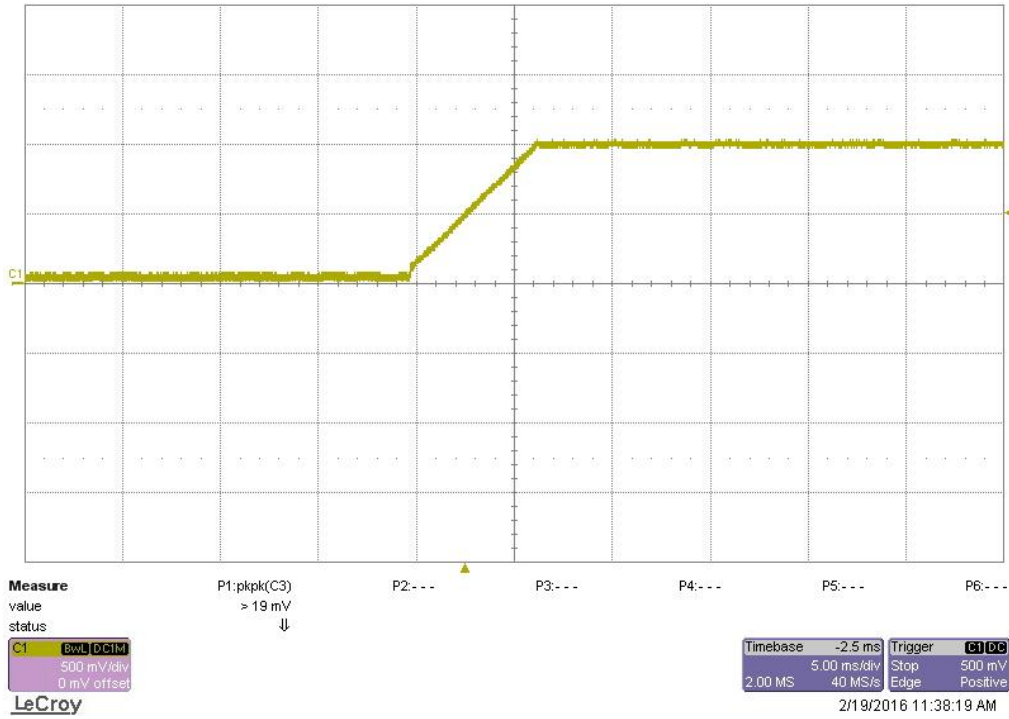


1.6 TPS544C25: 0.85V

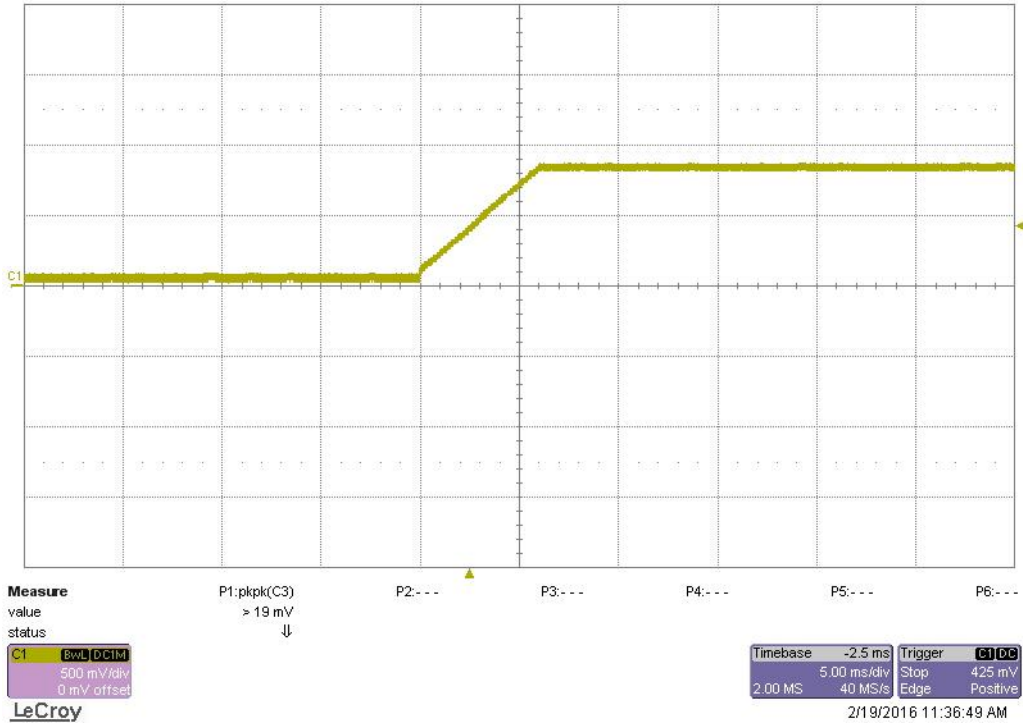

1.7 TPS53647: 1V (VCORE)

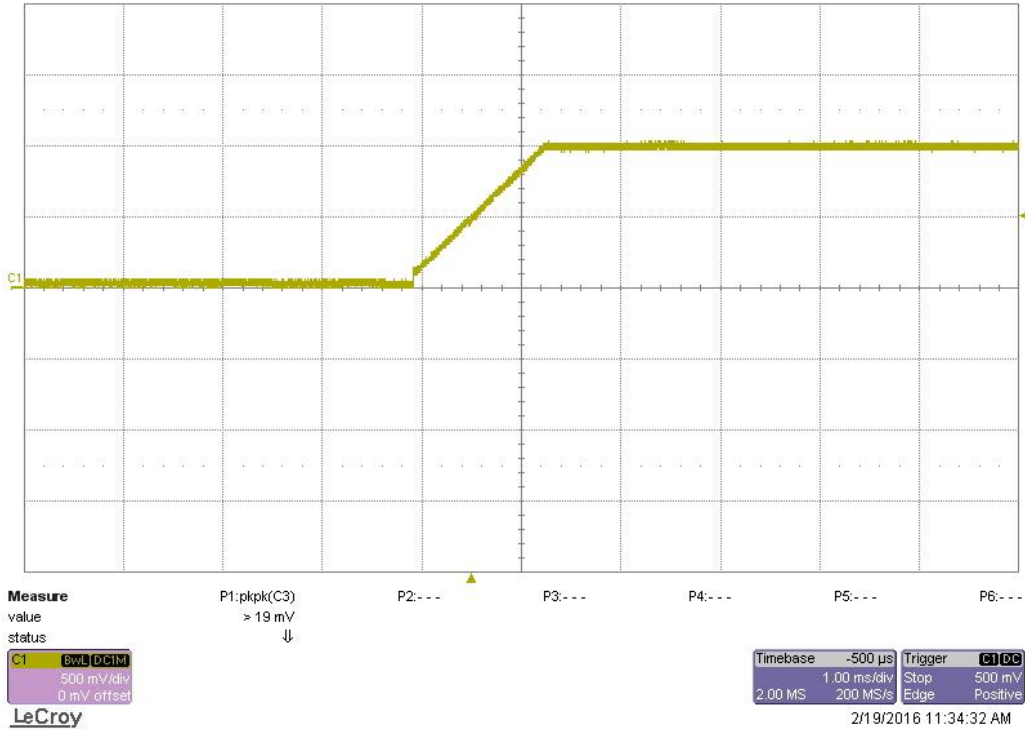


1.8 TPS53317: 0.6V

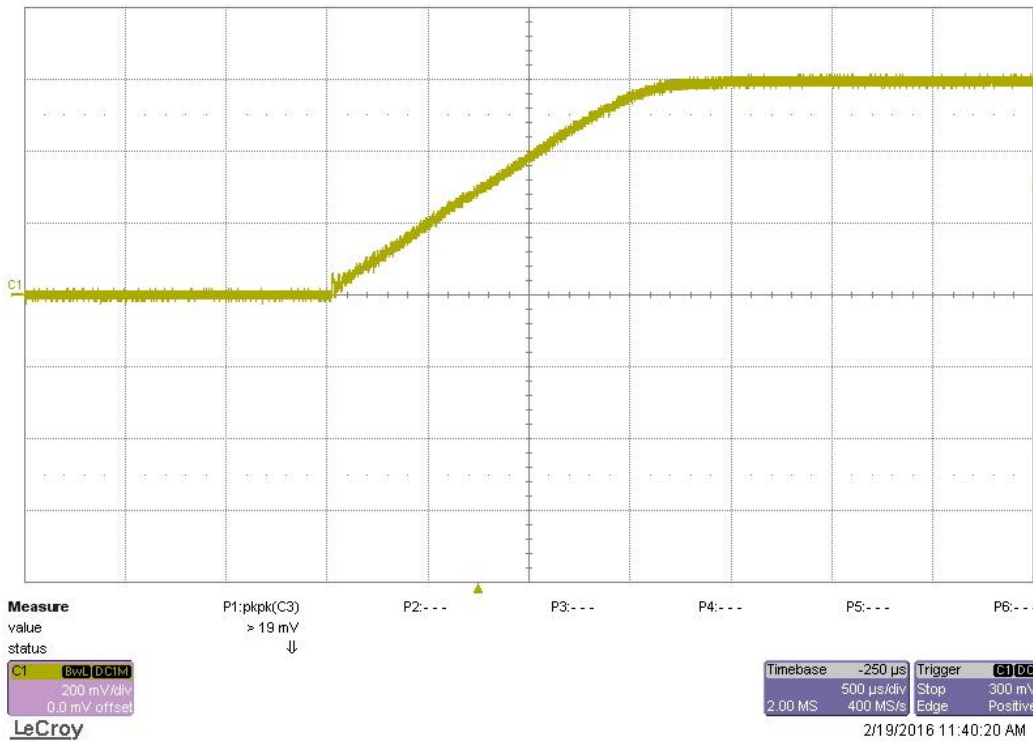


2 Shutdown, 1A Load


2.1 TPS548D22: 5V

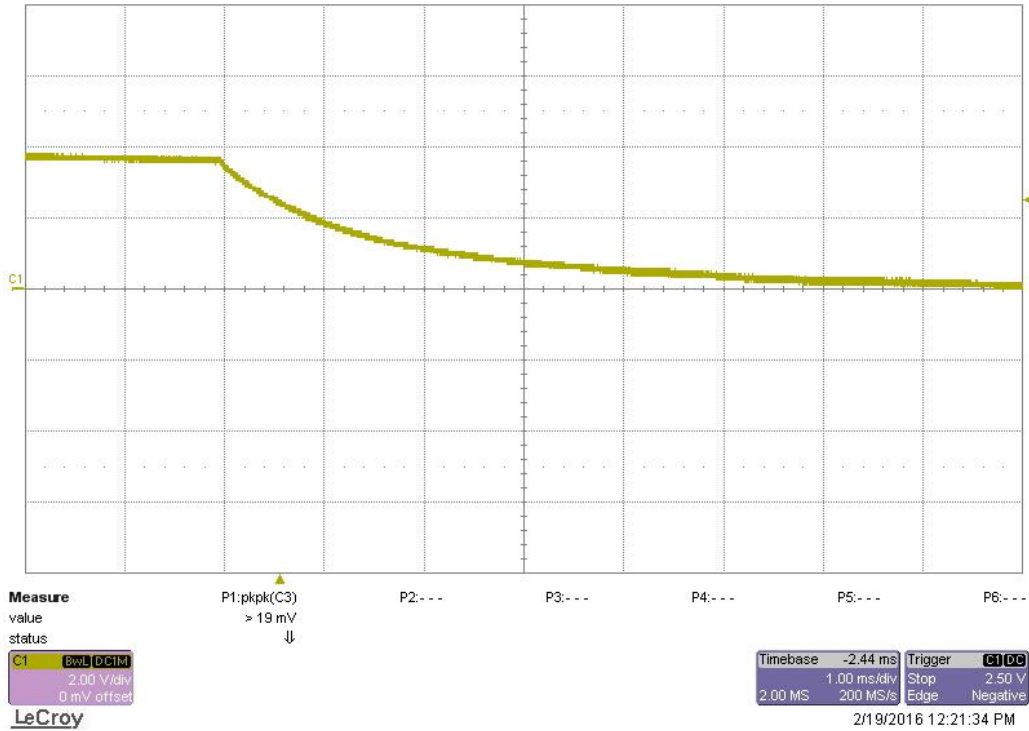


2.2 TPS549A20: 3.3V

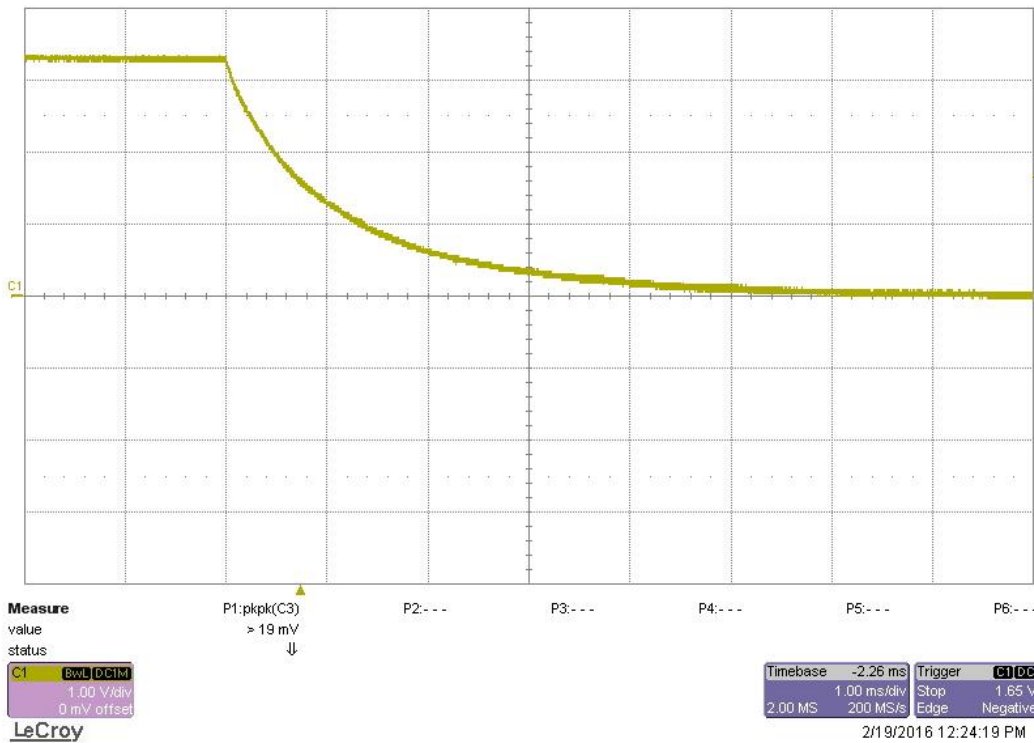


2.3 TPS53513: 1.5V

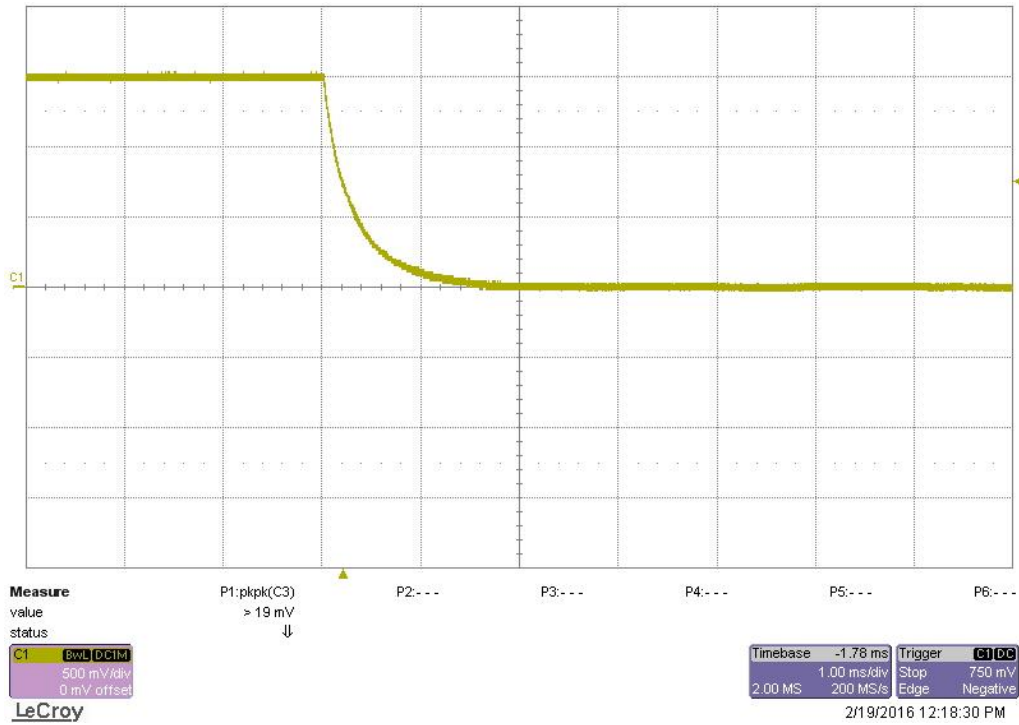


2.4 TPS53515: 1.2V

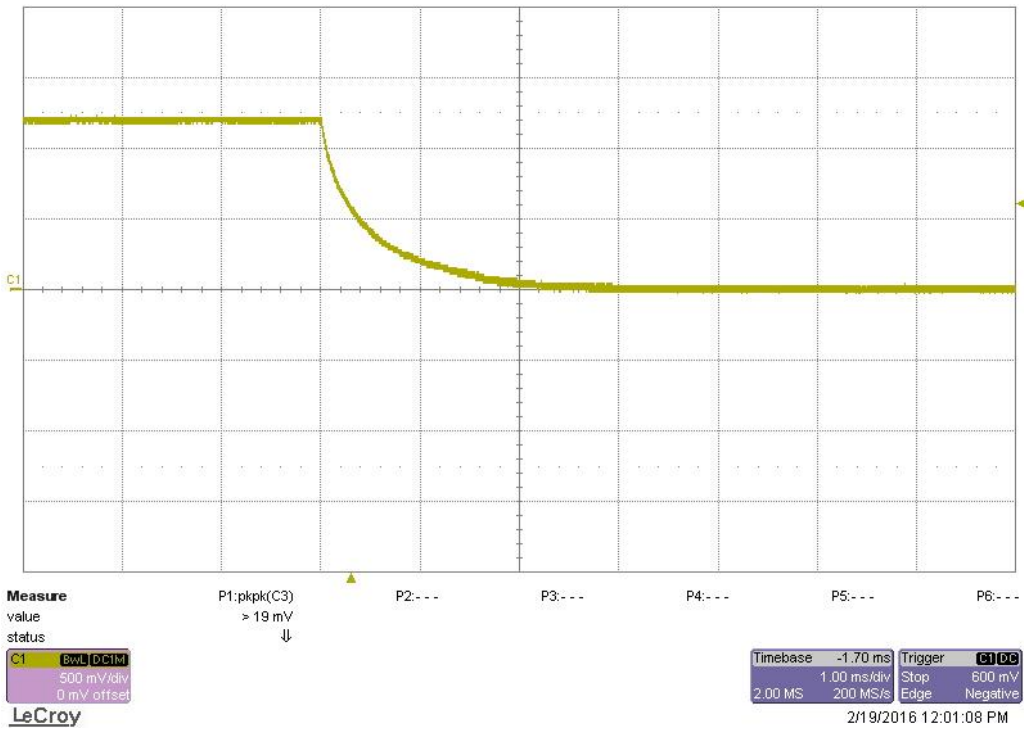


2.5 TPS544C25: 1V

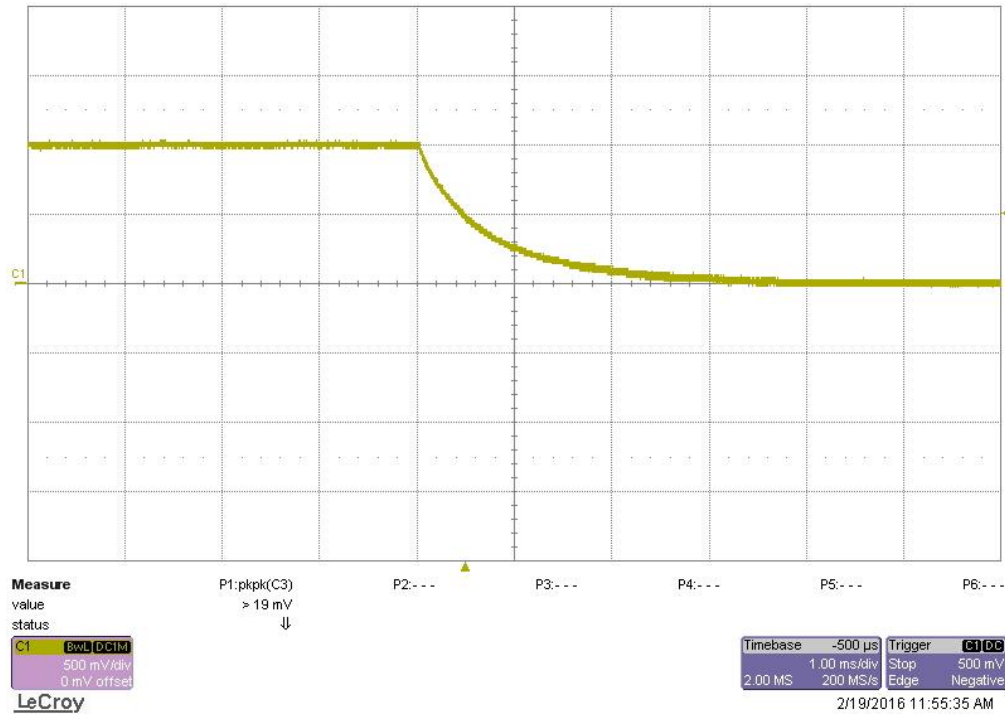


2.6 TPS544C25: 0.85V

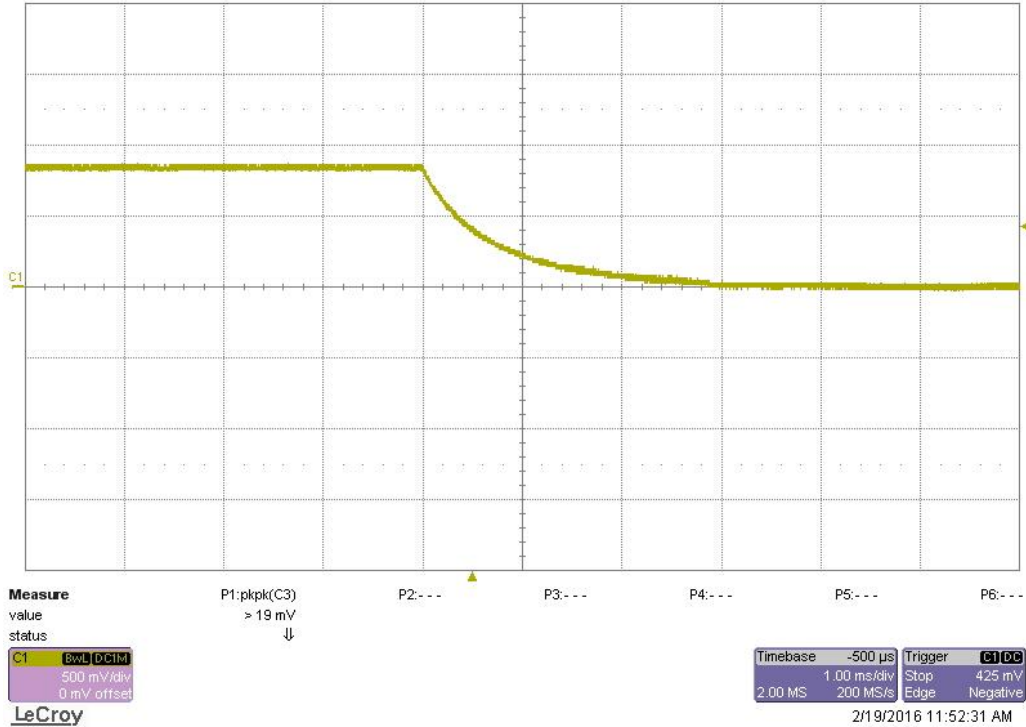

2.7 TPS53647: 1V (VCORE)

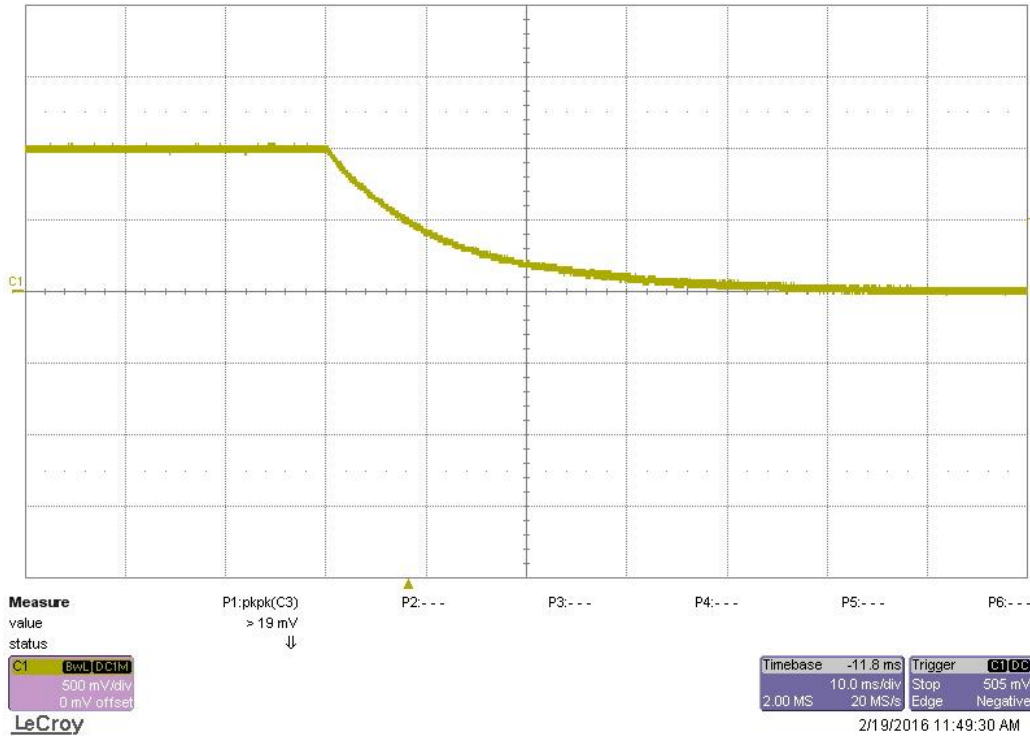


2.8 TPS53317: 0.6V

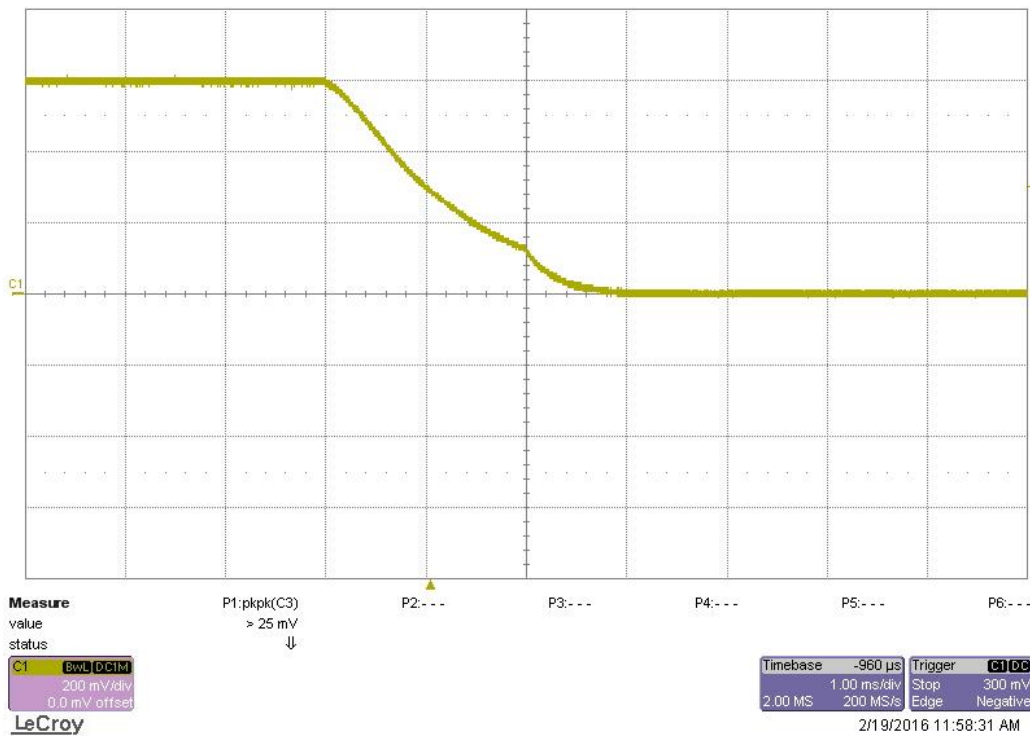


3 Output Ripple, Full Load


3.1 TPS548D22: 5V@10A

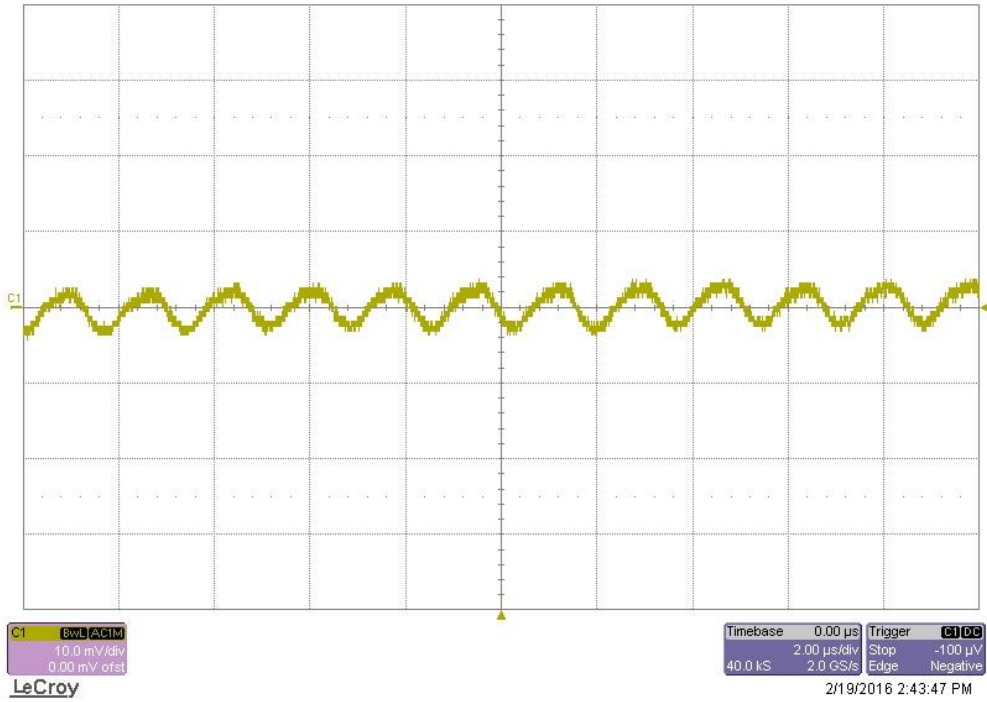


3.2 TPS549A20: 3.3V@14A

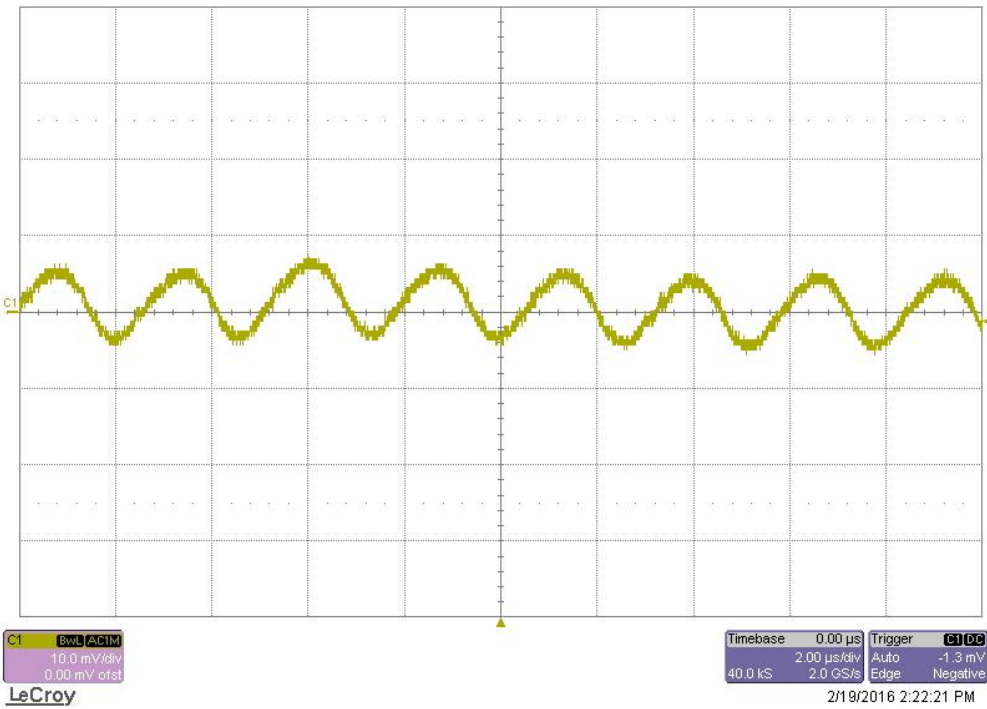


3.3 TPS53513: 1.5V@8A

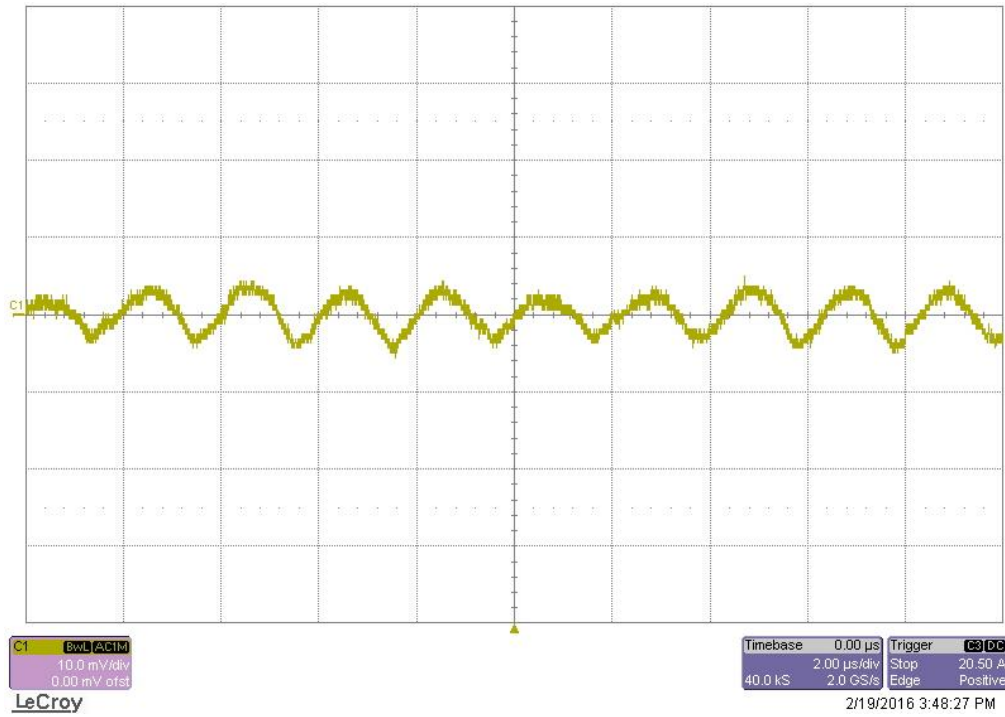


3.4 TPS53515: 1.2V@12A

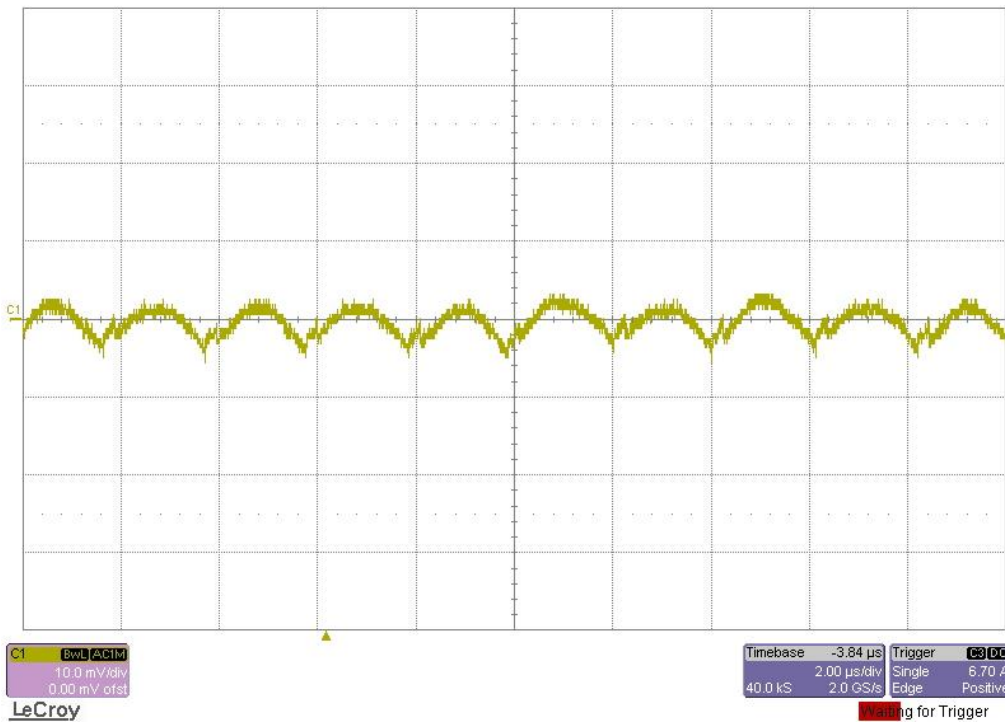


3.5 TPS544C25: 1V@15A

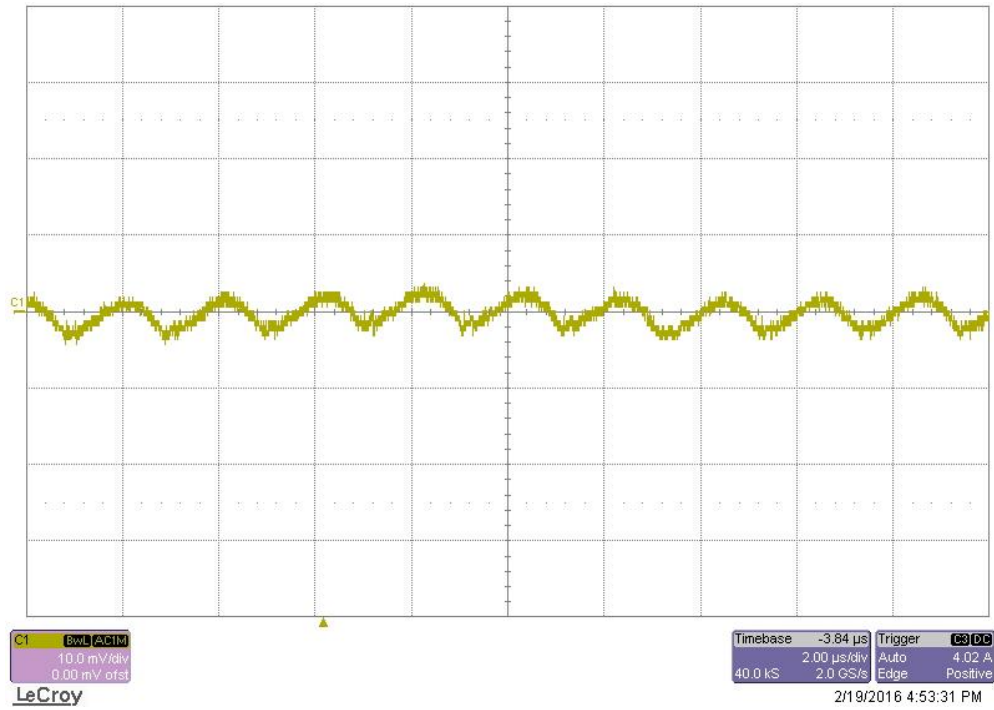


3.6 TPS544C25: 0.85V@15A

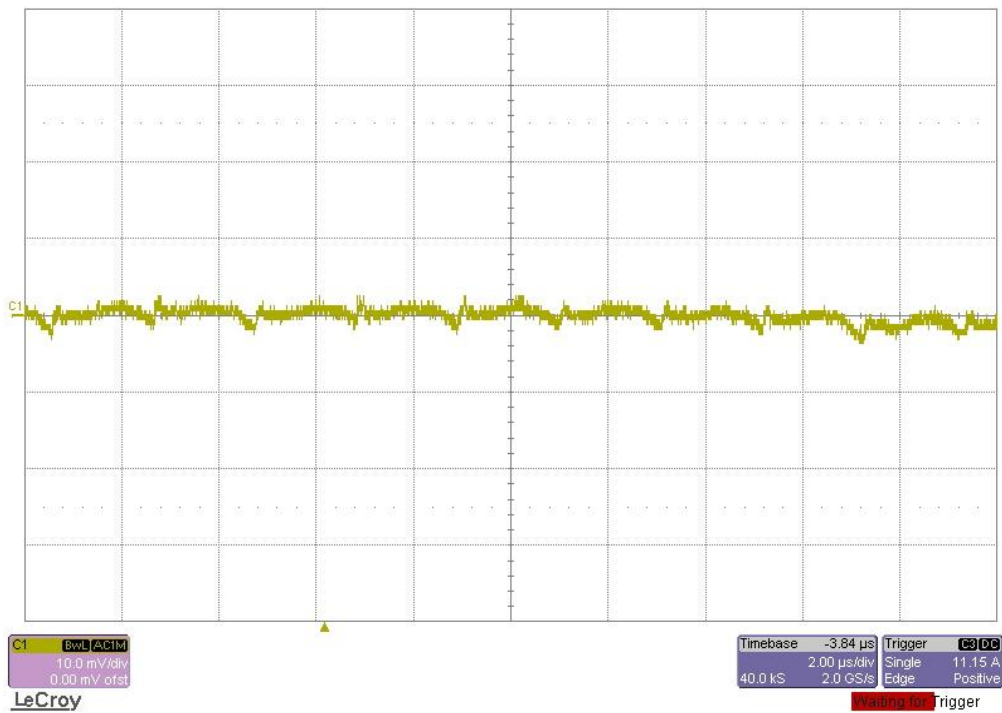

3.7 TPS53647: 1V@30A (V_{CORE})

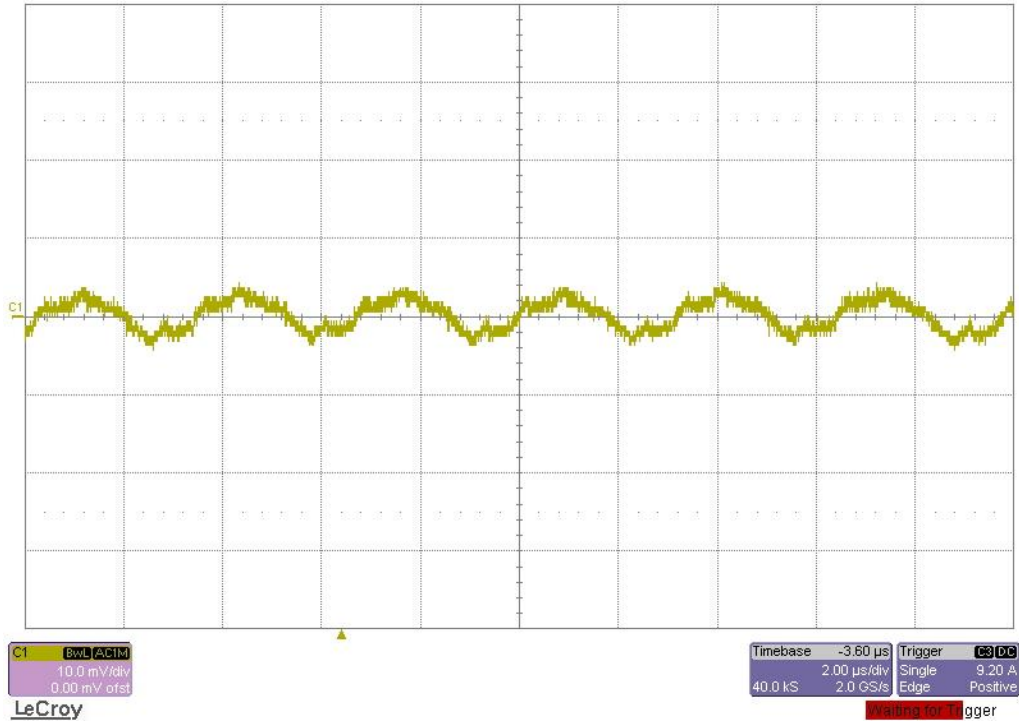


3.8 TPS53317: 0.6V@6A

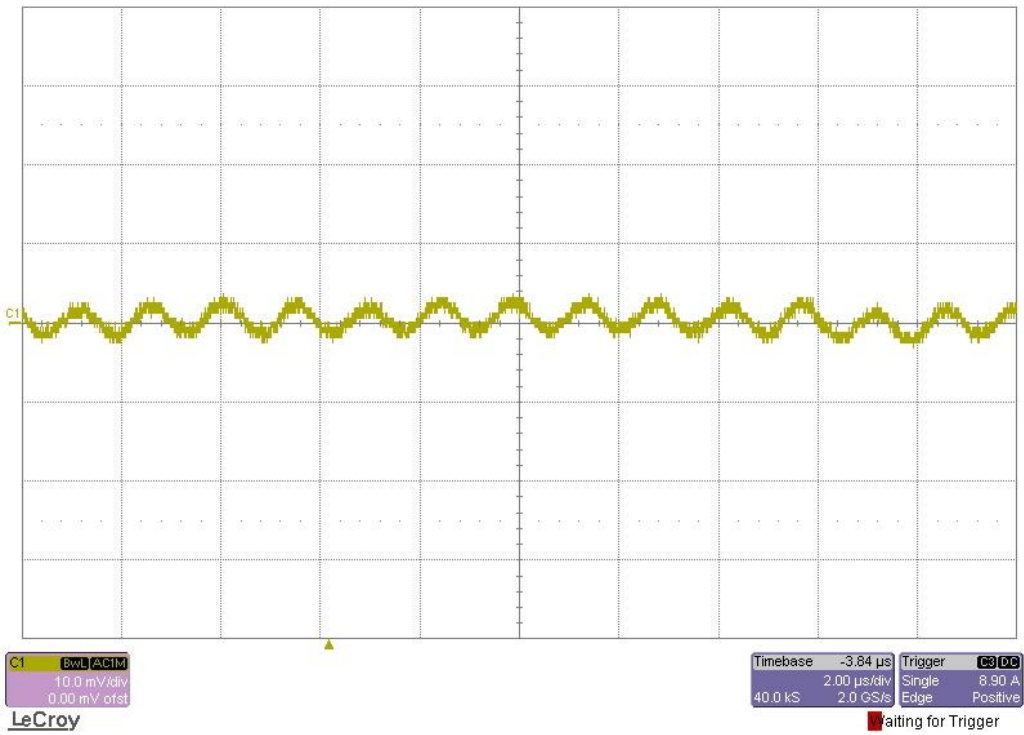

4 Efficiency

The graphs below approximate the efficiency of each rail. In order to obtain a more accurate depiction of individual rail efficiency, the current draw at no load (“Actual I_{in}” at I_{out} = 0A) was subtracted from each “Actual I_{in}” measurement point to produce an adjusted input current “I_{in} (adj)”. Rails are individually loaded and all rails were enabled.


4.1 TPS548D22: 5V@10A

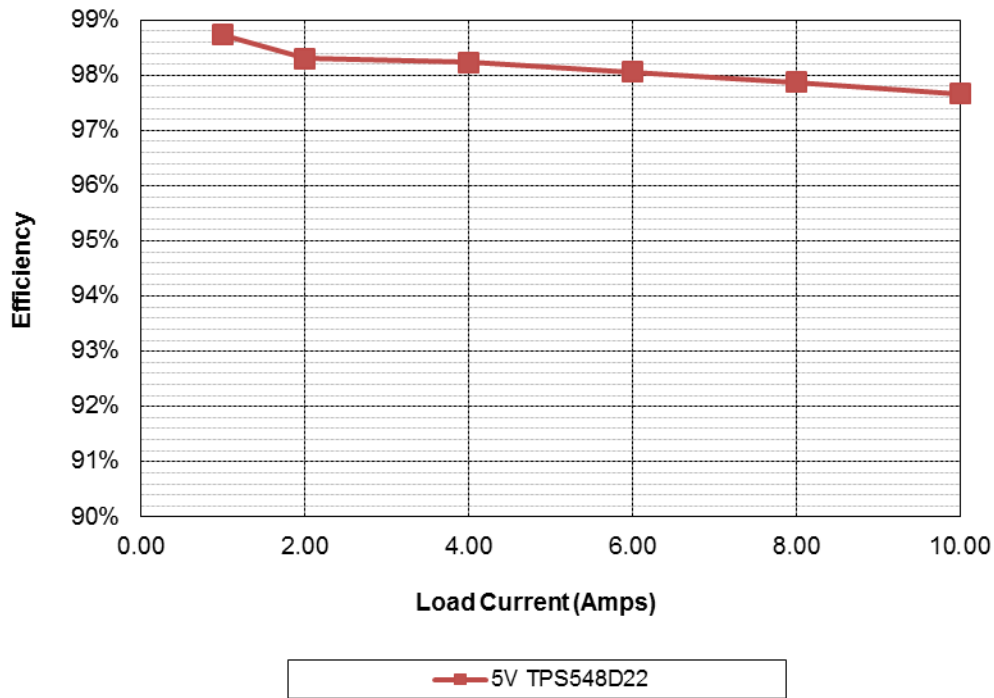

5V@10A - TPS548D22

I _{out}	V _{out}	V _{in}	I _{in} (adj)	Actual I _{in}	P _{in}	P _{out}	Losses	Efficiency
0.000	5.010	12.3		0.74900		0.00		0.0%
1.000	5.010	12.2	0.4150	1.1640	5.074	5.01	0.06	98.7%
2.000	5.010	12.2	0.8370	1.586	10.193	10.02	0.17	98.3%
4.000	5.010	12.1	1.6890	2.438	20.400	20.04	0.36	98.2%
6.000	5.010	12.0	2.5600	3.309	30.656	30.06	0.60	98.1%
8.000	5.010	11.9	3.4500	4.199	40.952	40.08	0.87	97.9%
10.000	5.010	11.8	4.3630	5.112	51.300	50.10	1.20	97.7%


4.2 TPS549A20: 3.3V@14A

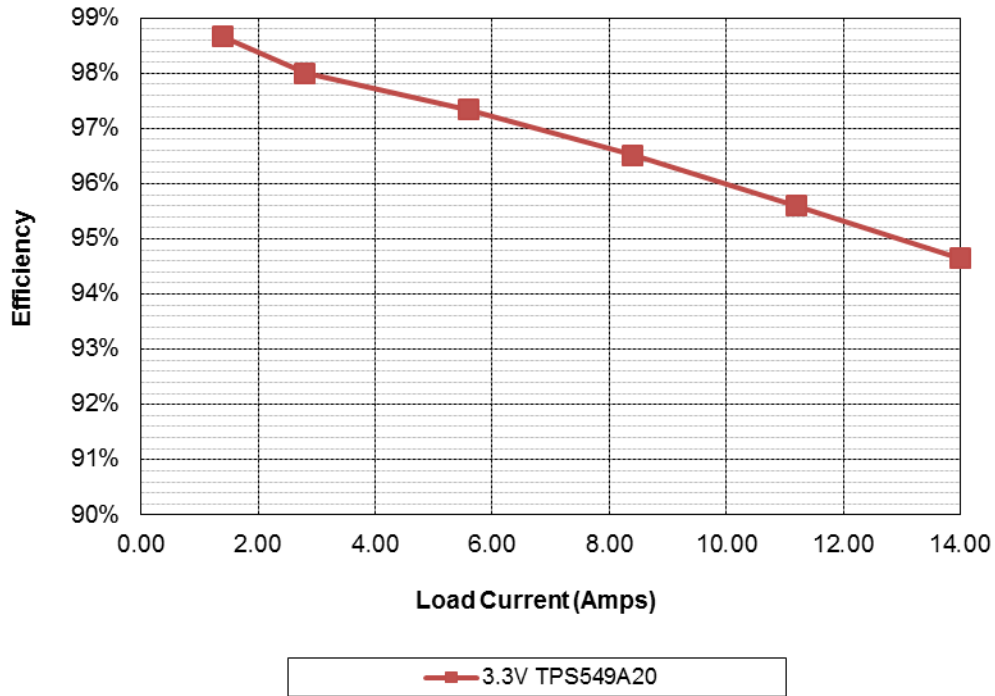

3.3V@14A - TPS549A20

I _{out}	V _{out}	V _{in}	I _{in} (adj)	Actual I _{in}	P _{in}	P _{out}	Losses	Efficiency
0.000	3.311	12.3		0.74900		0.00		0.0%
1.400	3.311	12.2	0.3840	1.1330	4.698	4.64	0.06	98.7%
2.800	3.311	12.2	0.7760	1.525	9.460	9.27	0.19	98.0%
5.600	3.310	12.1	1.5740	2.323	19.044	18.54	0.51	97.3%
8.400	3.309	12.0	2.3990	3.148	28.800	27.80	1.00	96.5%
11.200	3.307	11.9	3.2540	4.003	38.745	37.04	1.71	95.6%
14.000	3.305	11.8	4.1430	4.892	48.887	46.27	2.62	94.6%


4.3 TPS53513: 1.5V@8A

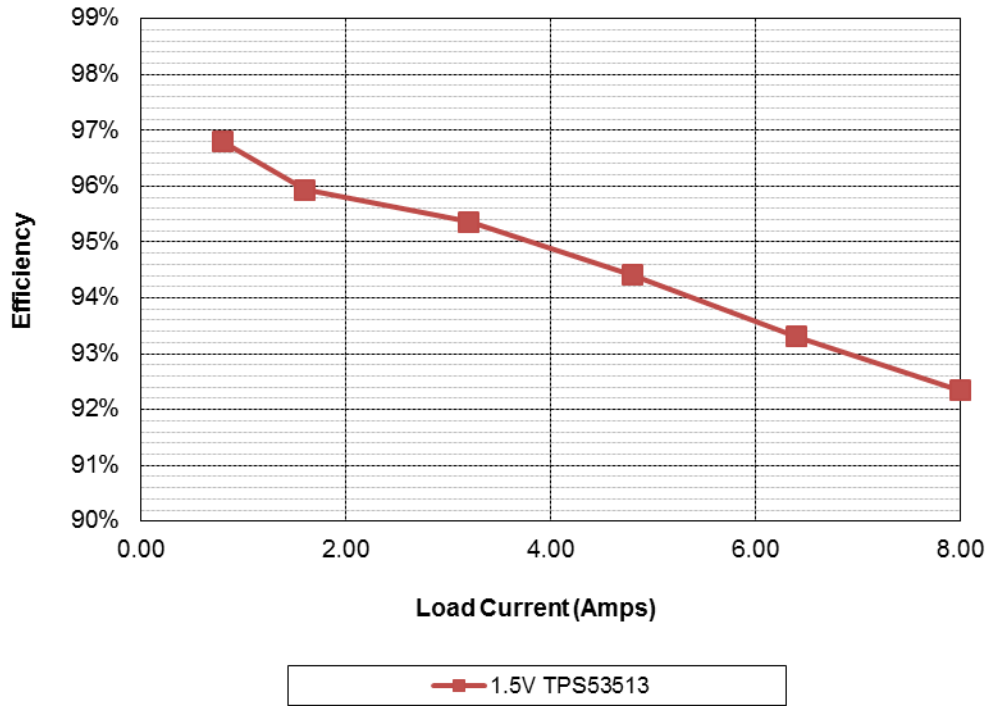

1.5V@8A - TPS53513

lout	Vout AC/DC	Vin	lin (adj)	Actual lin	Pin	Pout AC/DC	Losses	Efficiency
0.000	1.499	12.3		0.74800		0.00		0.0%
0.800	1.499	12.3	0.1010	0.8490	1.239	1.20	0.04	96.8%
1.600	1.499	12.3	0.2040	0.952	2.500	2.40	0.10	95.9%
3.200	1.498	12.2	0.4110	1.159	5.027	4.79	0.23	95.4%
4.800	1.498	12.2	0.6240	1.372	7.617	7.19	0.43	94.4%
6.400	1.497	12.2	0.8430	1.591	10.269	9.58	0.69	93.3%
8.000	1.497	12.2	1.0670	1.815	12.969	11.98	0.99	92.3%


4.4 TPS53515: 1.2V@12A

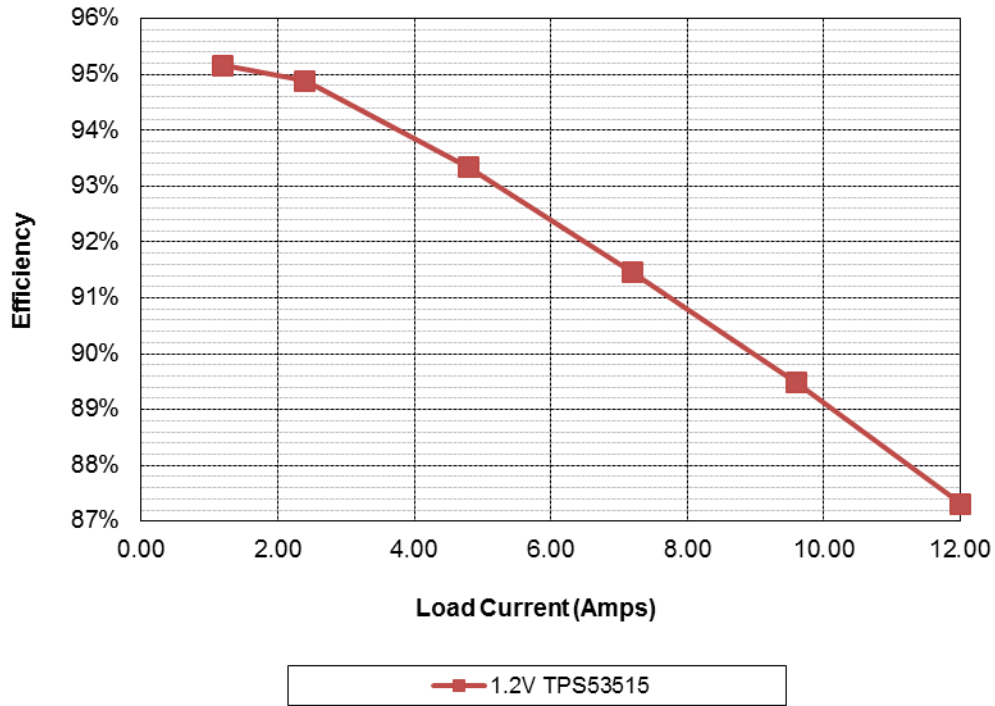

1.2V@12A - TPS53515

Iout	Vout	Vin	Iin (adj)	Actual Iin	Pin	Pout	Losses	Efficiency
0.000	1.196	12.3		0.75000		0.00		0.0%
1.200	1.196	12.3	0.1230	0.8730	1.508	1.44	0.07	95.2%
2.400	1.196	12.2	0.2470	0.997	3.025	2.87	0.15	94.9%
4.800	1.195	12.2	0.5030	1.253	6.146	5.74	0.41	93.3%
7.200	1.195	12.2	0.7720	1.522	9.408	8.60	0.80	91.5%
9.600	1.194	12.2	1.0540	1.804	12.809	11.46	1.35	89.5%
12.000	1.193	12.1	1.3530	2.103	16.396	14.32	2.08	87.3%


4.5 TPS544C25: 1V@15A

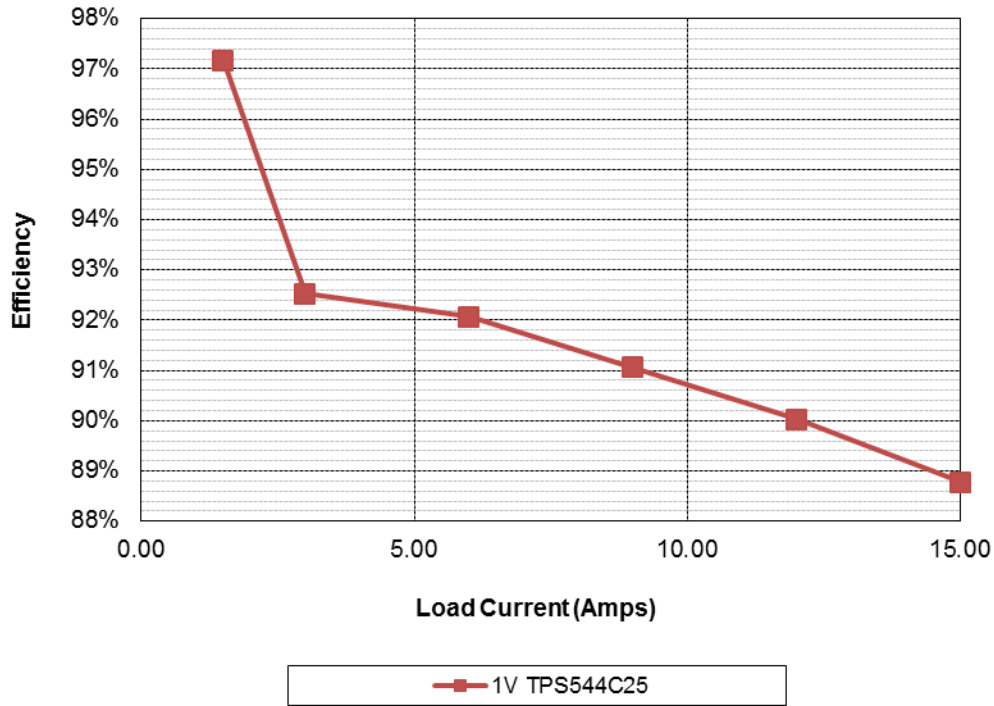

1V@15A - TPS544C25

Iout	Vout	Vin	Iin (adj)	Actual Iin	Pin	Pout	Losses	Efficiency
0.000	1.001	12.3		0.74900		0.00		0.0%
1.500	1.001	12.3	0.1260	0.8750	1.545	1.50	0.04	97.2%
3.000	1.001	12.2	0.2650	1.014	3.245	3.00	0.24	92.5%
6.000	1.001	12.2	0.5340	1.283	6.523	6.01	0.52	92.1%
9.000	1.001	12.2	0.8120	1.561	9.893	9.01	0.88	91.1%
12.000	1.001	12.2	1.0980	1.847	13.342	12.01	1.33	90.0%
15.000	1.001	12.1	1.3960	2.145	16.914	15.02	1.90	88.8%


4.6 TPS544C25: 0.85V@15A

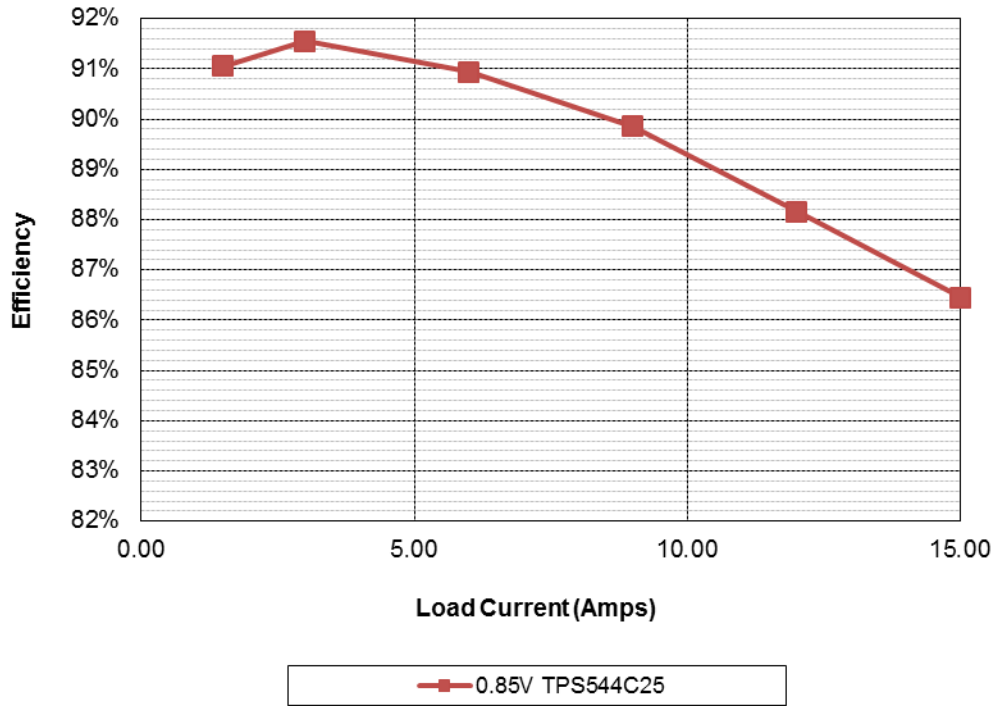

0.85V@15A - TPS544C25

lout	Vout	Vin	lin (adj)	Actual lin	Pin	Pout	Losses	Efficiency
0.000	0.850	12.0		0.75300		0.00		0.0%
1.500	0.849	12.3	0.1140	0.8670	1.399	1.27	0.13	91.1%
3.000	0.849	12.3	0.227	0.980	2.782	2.55	0.23	91.6%
6.000	0.849	12.2	0.458	1.211	5.601	5.09	0.51	90.9%
9.000	0.848	12.2	0.696	1.449	8.494	7.63	0.86	89.9%
12.000	0.848	12.2	0.948	1.701	11.543	10.18	1.37	88.2%
15.000	0.848	12.1	1.212	1.965	14.712	12.72	1.99	86.5%


4.7 TPS53647: 1V@30A (VCORE)

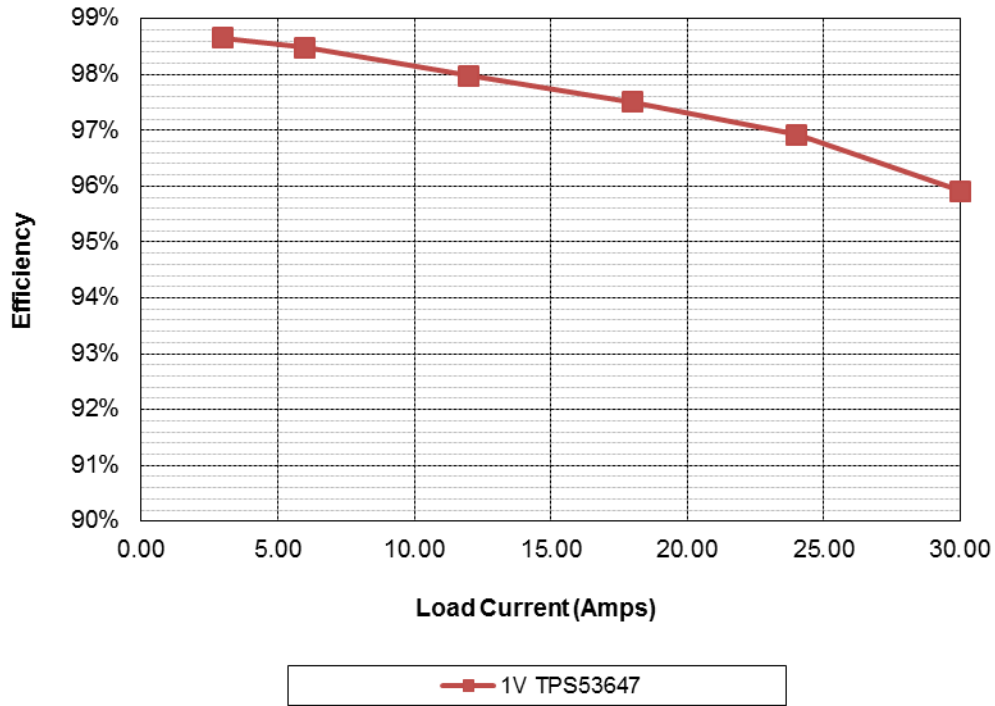

1V@30A - TPS53647

Iout	Vout	Vin	Iin (adj)	Actual Iin	Pin	Pout	Losses	Efficiency
0.000	0.999	12.3		0.74900		0.00		0.0%
3.000	0.999	12.3	0.2480	0.9970	3.038	3.00	0.04	98.7%
6.000	0.999	12.2	0.4980	1.247	6.087	5.99	0.09	98.5%
12.000	0.998	12.2	1.0050	1.754	12.224	11.98	0.25	98.0%
18.000	0.998	12.1	1.5220	2.271	18.422	17.96	0.46	97.5%
24.000	0.998	12.0	2.0520	2.801	24.712	23.95	0.76	96.9%
30.000	0.998	12.0	2.6060	3.355	31.217	29.94	1.28	95.9%

4.8 TPS53317: 0.6V@6A

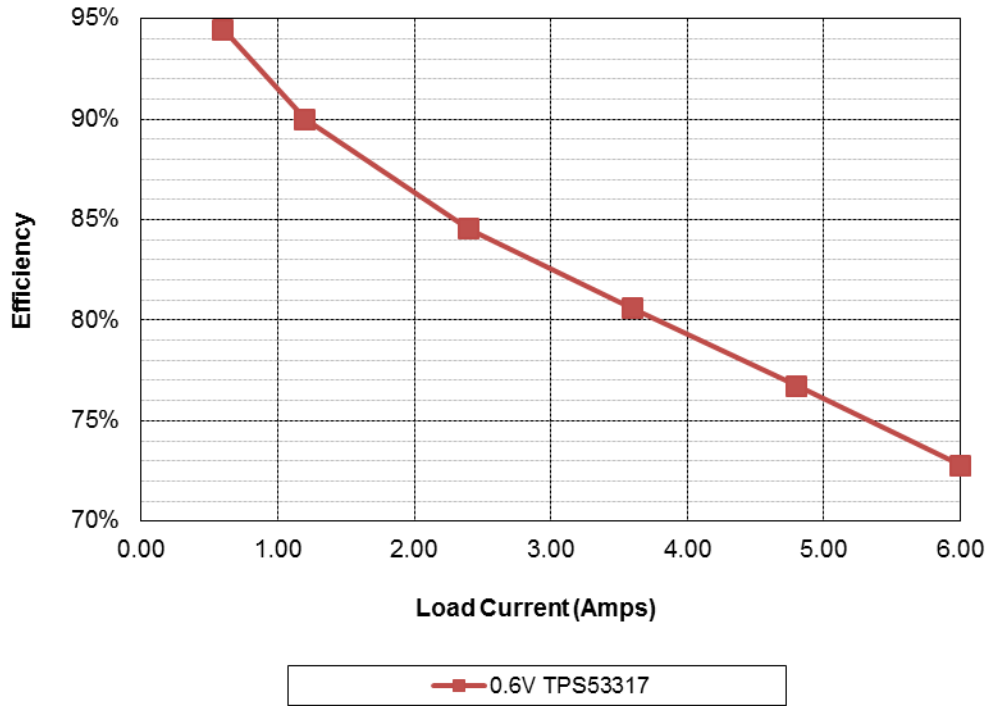


0.6V@6A - TPS53317


Iout	Vout	Vin	Iin (adj)	Actual Iin	Pin	Pout	Losses	Efficiency
0.000	0.600	12.3		0.74900		0.00		0.0%
0.600	0.599	12.3	0.0310	0.7800	0.380	0.36	0.02	94.5%
1.200	0.598	12.3	0.0650	0.814	0.797	0.72	0.08	90.0%
2.400	0.596	12.3	0.1380	0.887	1.692	1.43	0.26	84.5%
3.600	0.595	12.3	0.2170	0.966	2.658	2.14	0.52	80.6%
4.800	0.593	12.2	0.3030	1.052	3.709	2.85	0.86	76.7%
6.000	0.592	12.2	0.3990	1.148	4.880	3.55	1.33	72.8%

5 Load Transients, 50% to 100% load step


5.1 TPS548D22: 5V@10A

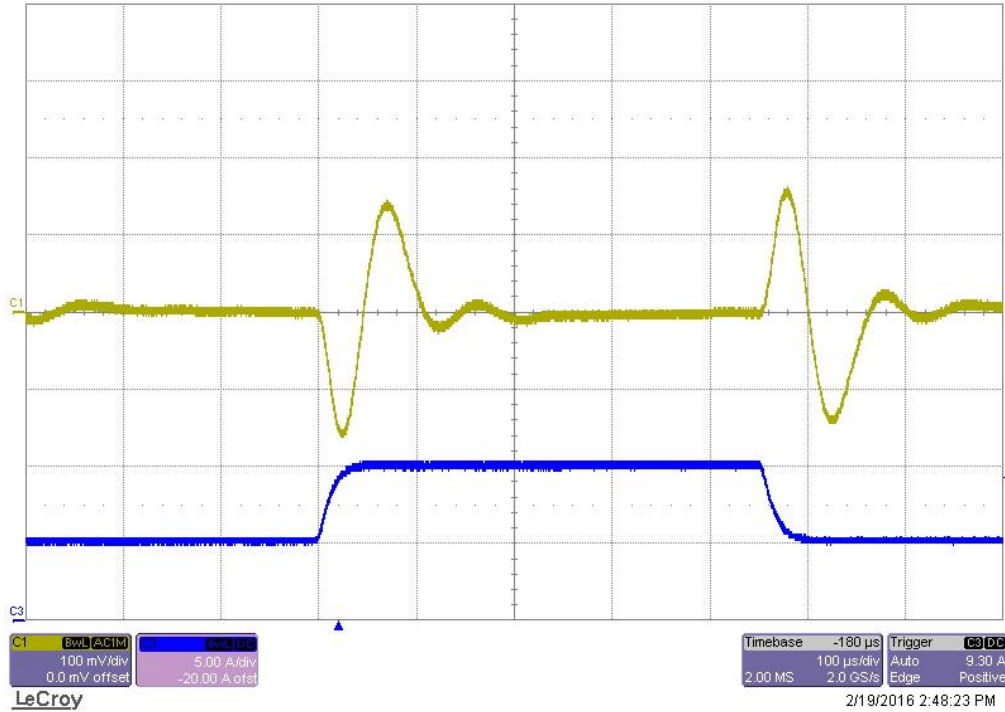


5.2 TPS549A20: 3.3V@14A

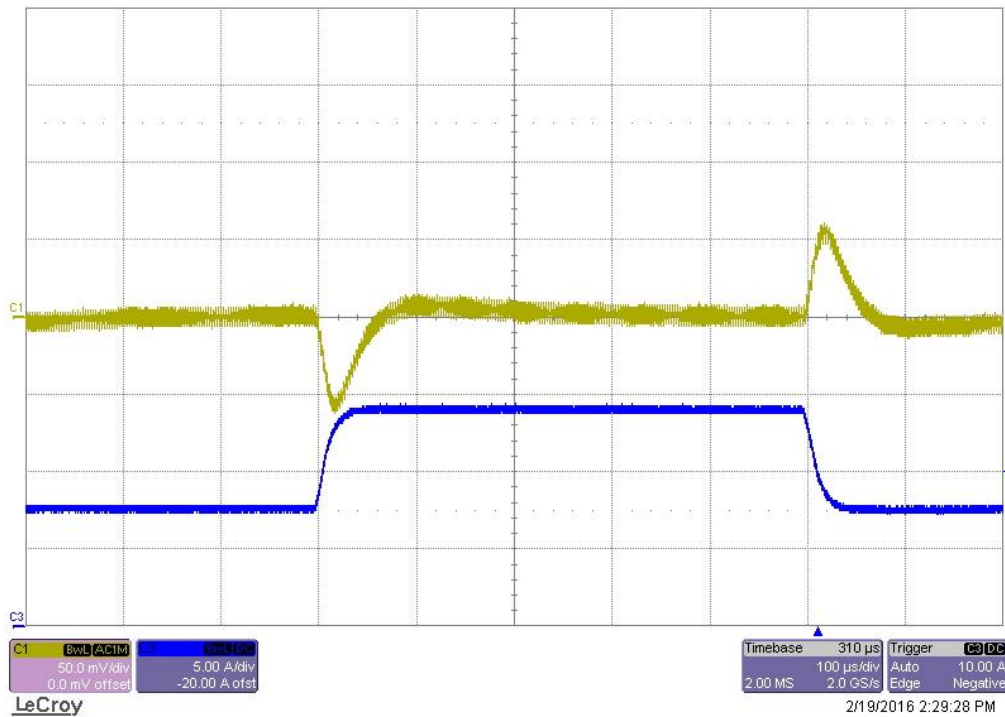


5.3 TPS53513: 1.5V@8A

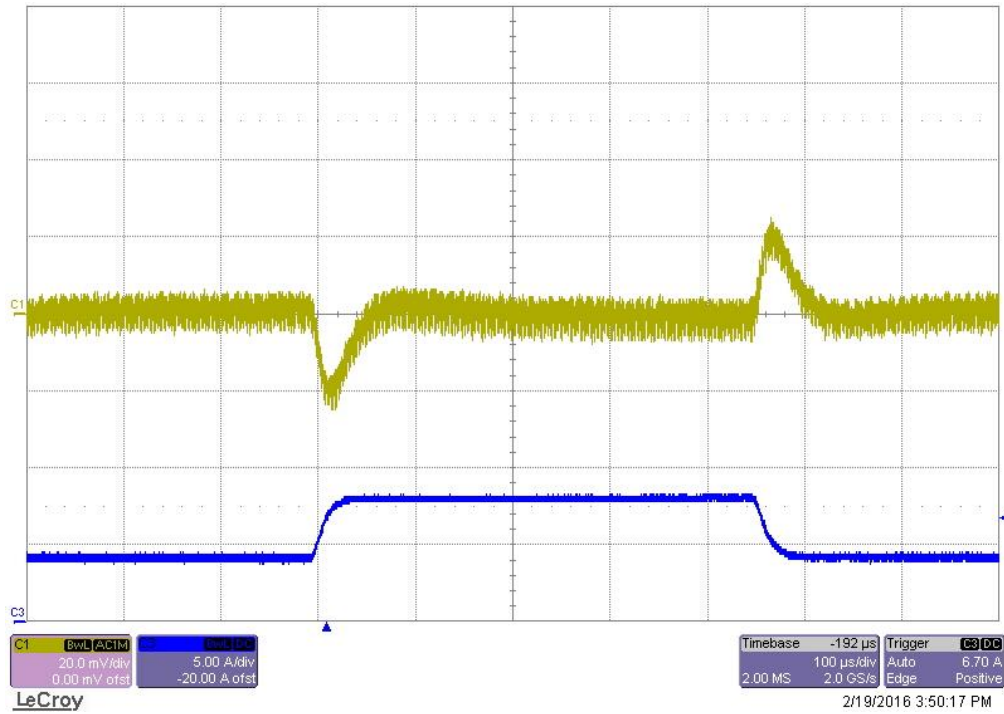


5.4 TPS53515: 1.2V@12A

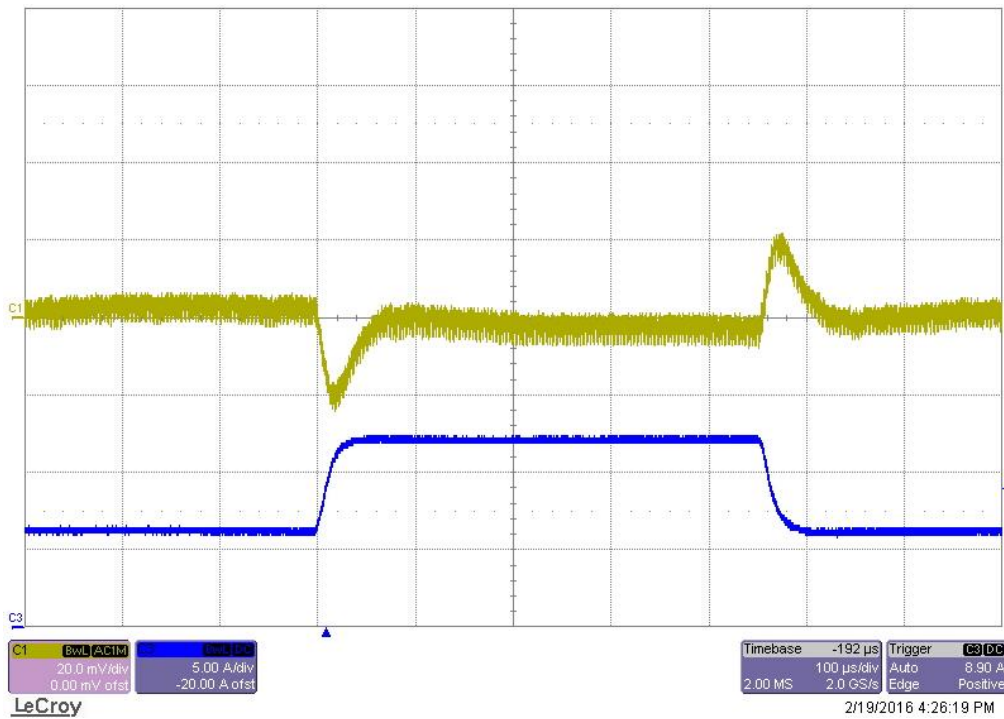


5.5 TPS544C25: 1V@15A

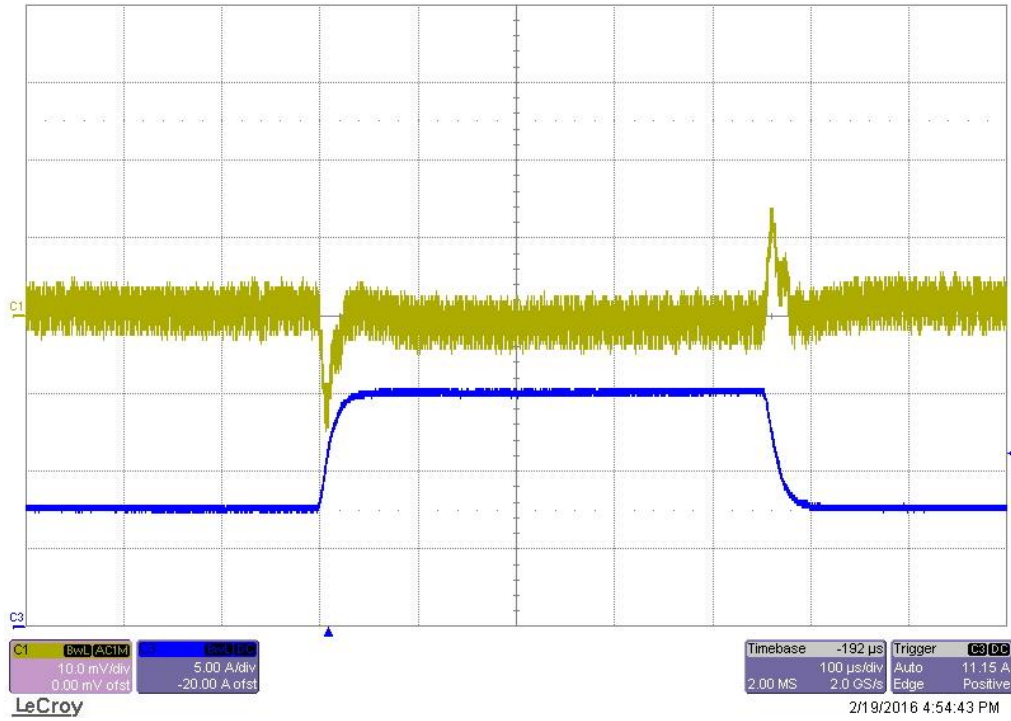


5.6 TPS544C25: 0.85V@15A

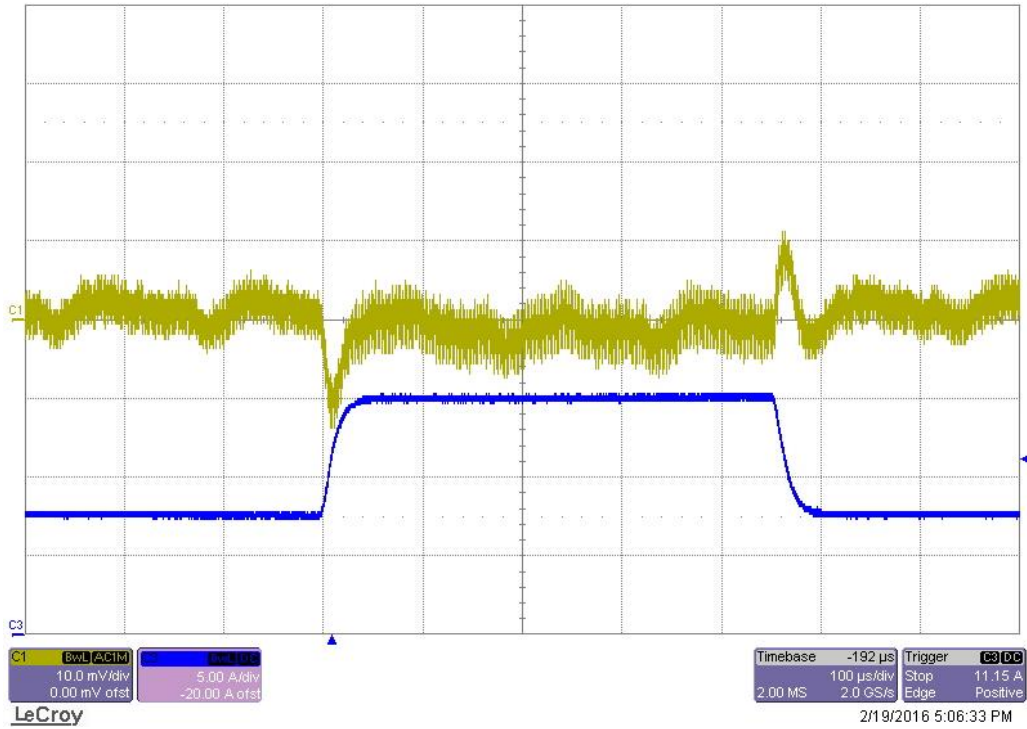

5.7 TPS53647: 1V@30A (V_{CORE})

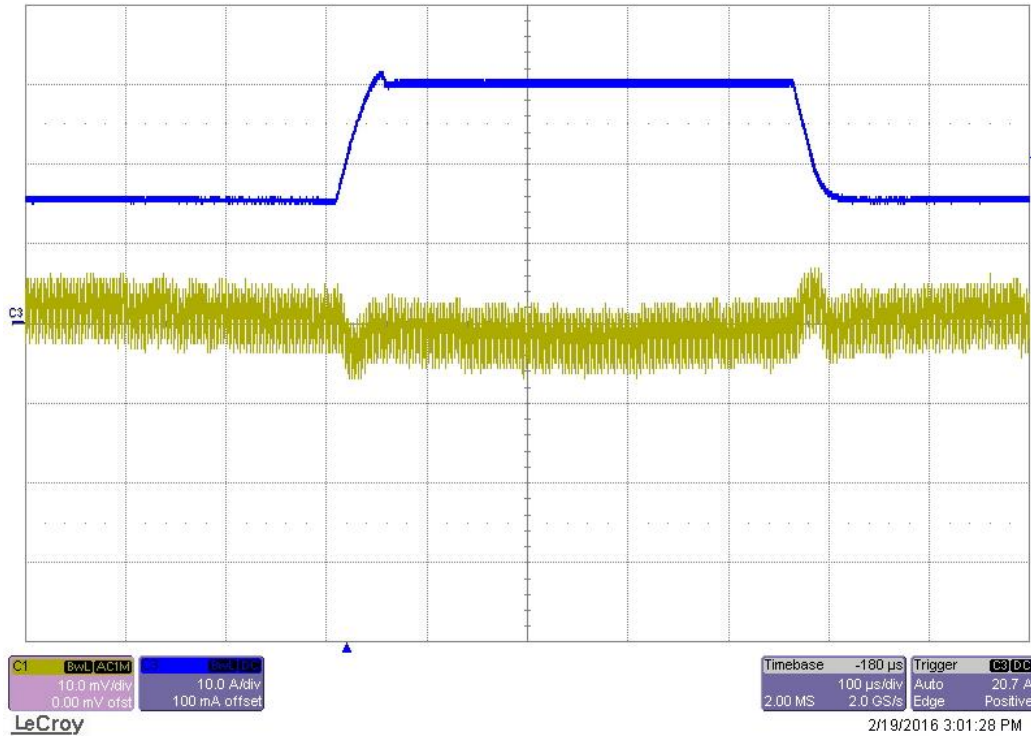


5.8 TPS53317: 0.6V@6A

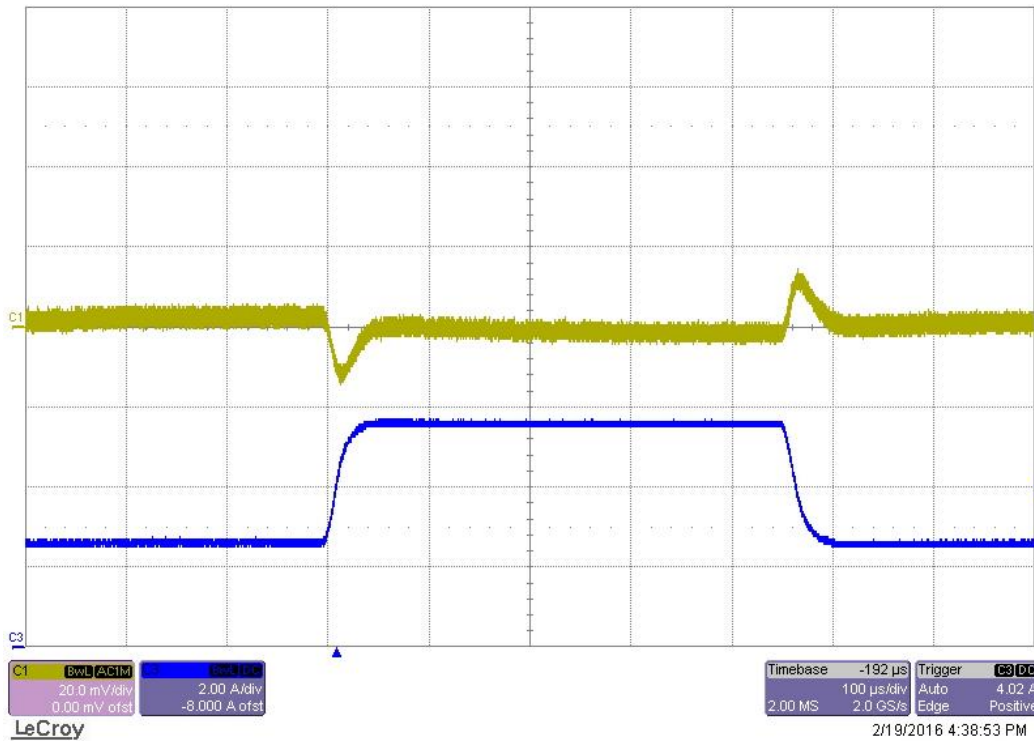


6 Switching Waveforms, Full Load


6.1 TPS548D22: 5V@10A

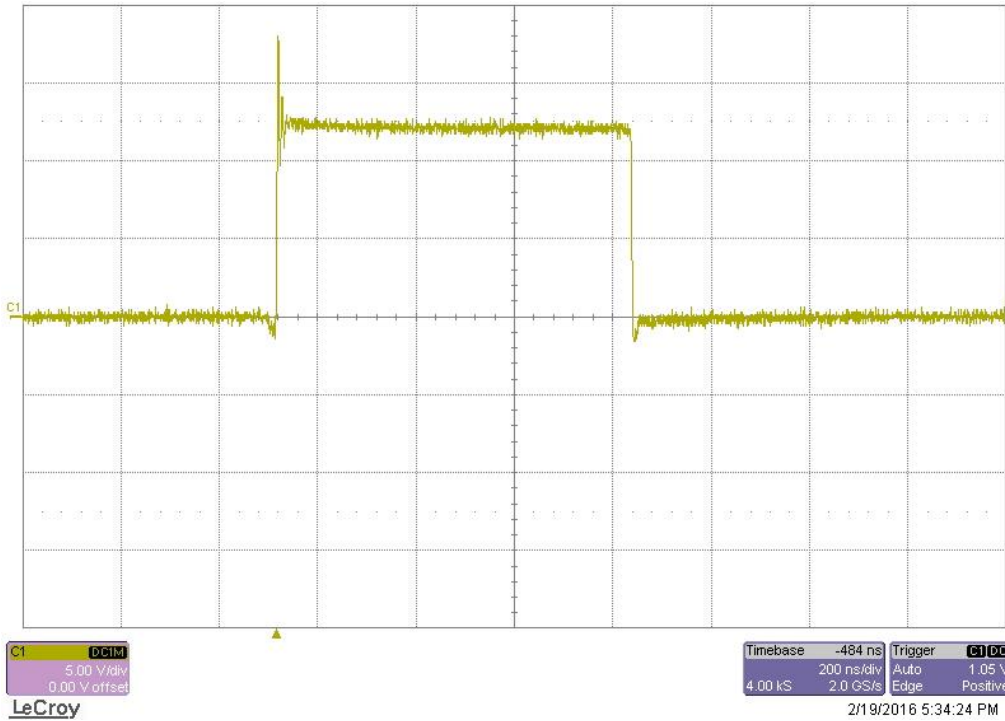


6.2 TPS549A20: 3.3V@14A

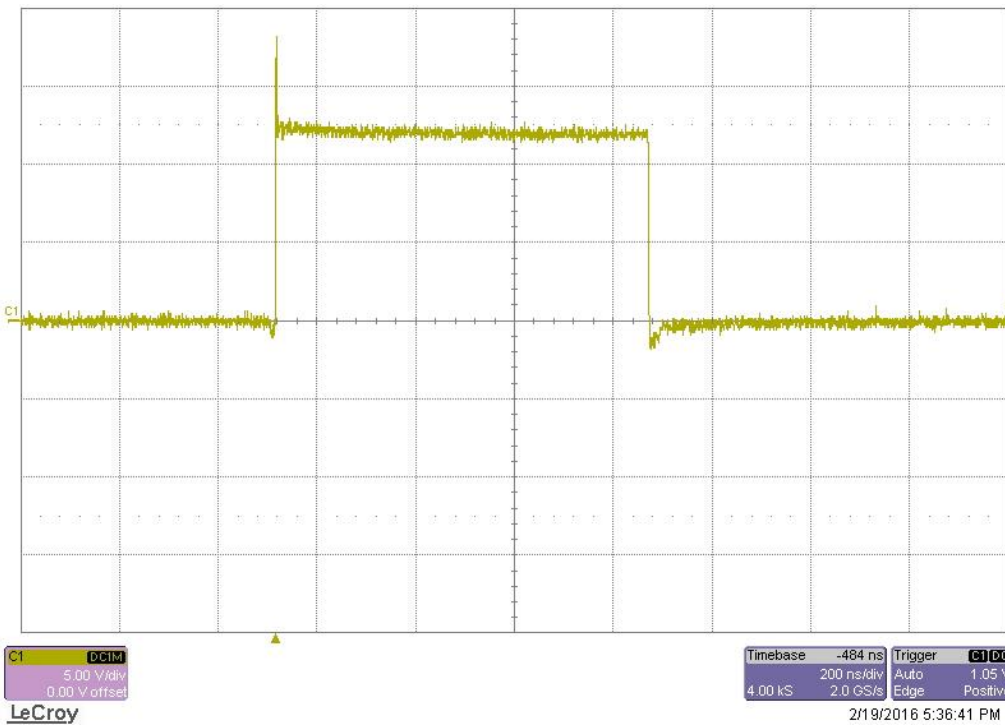


6.3 TPS53513: 1.5V@8A

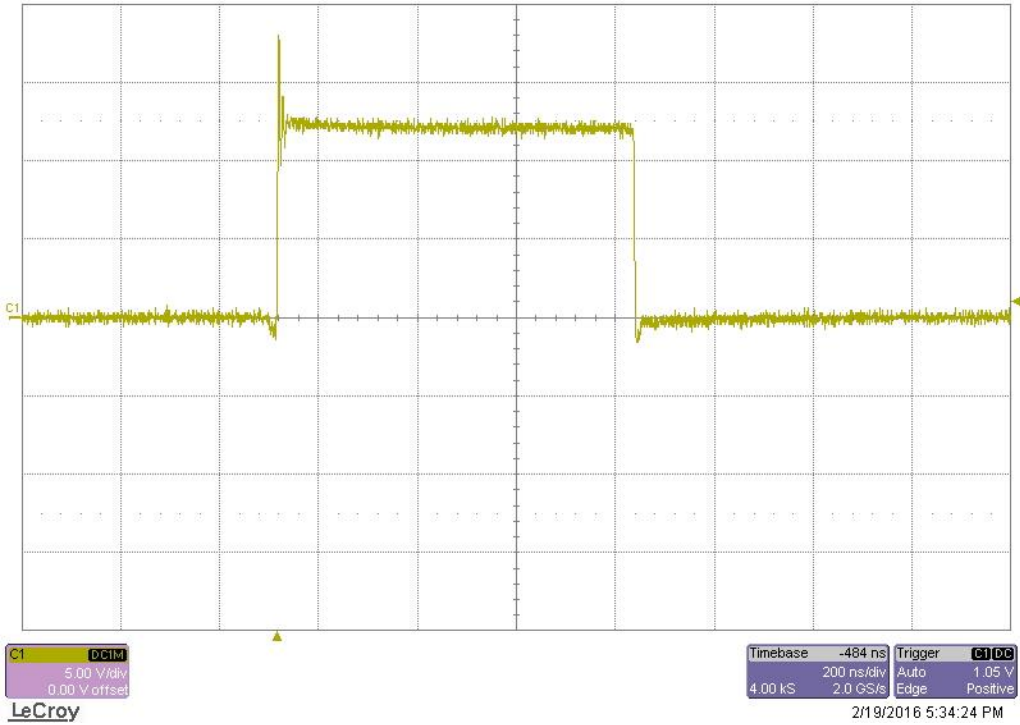


6.4 TPS53515: 1.2V@12A

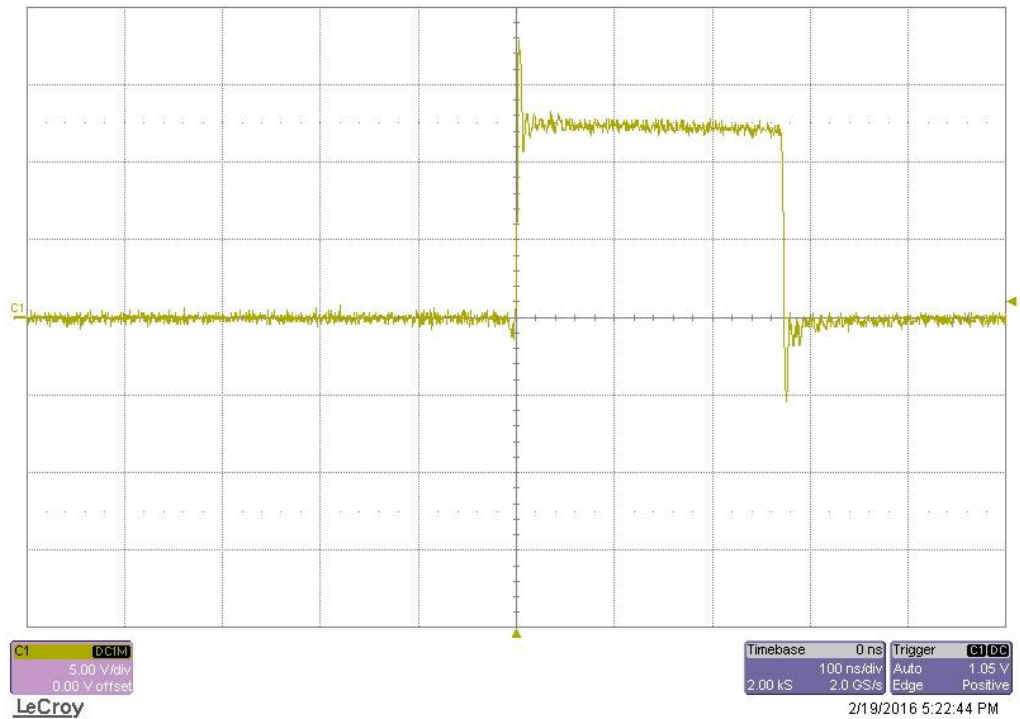


6.5 TPS544C25: 1V@15A

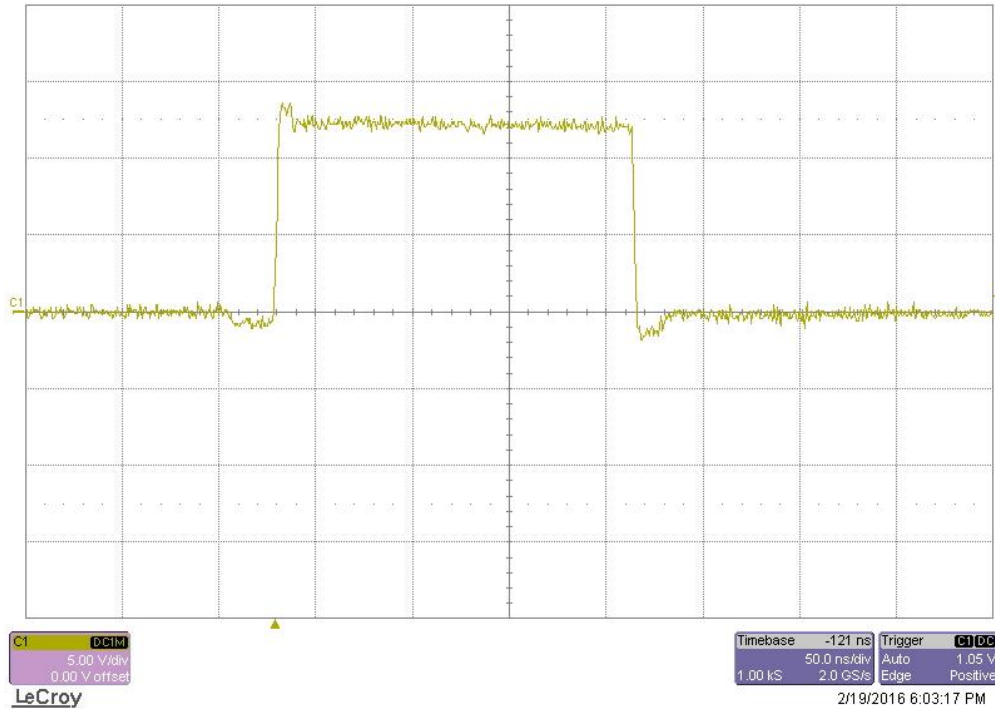


6.6 TPS544C25: 0.85V@15A

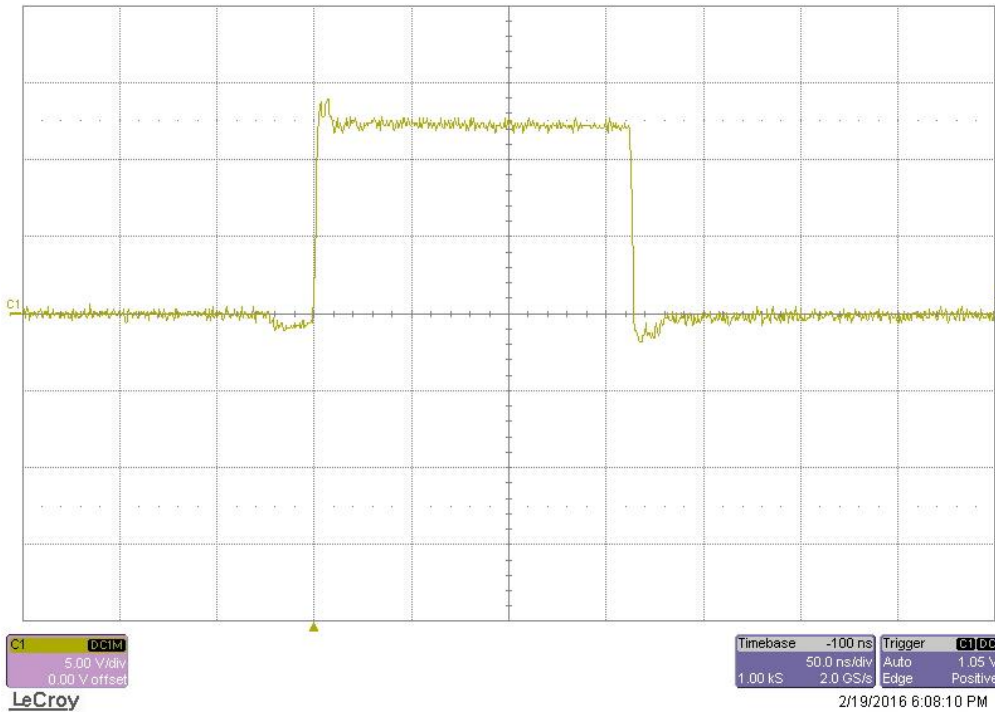

6.7 TPS53647: 1V@30A (V_{CORE})

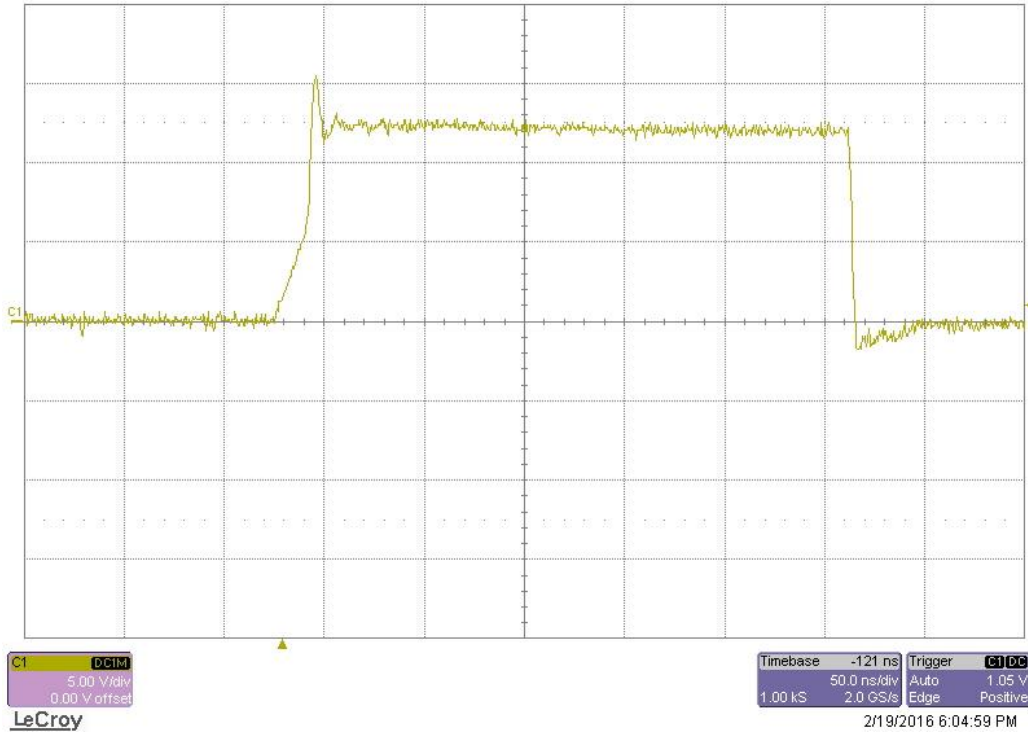


6.8 TPS53317: 0.6V@6A

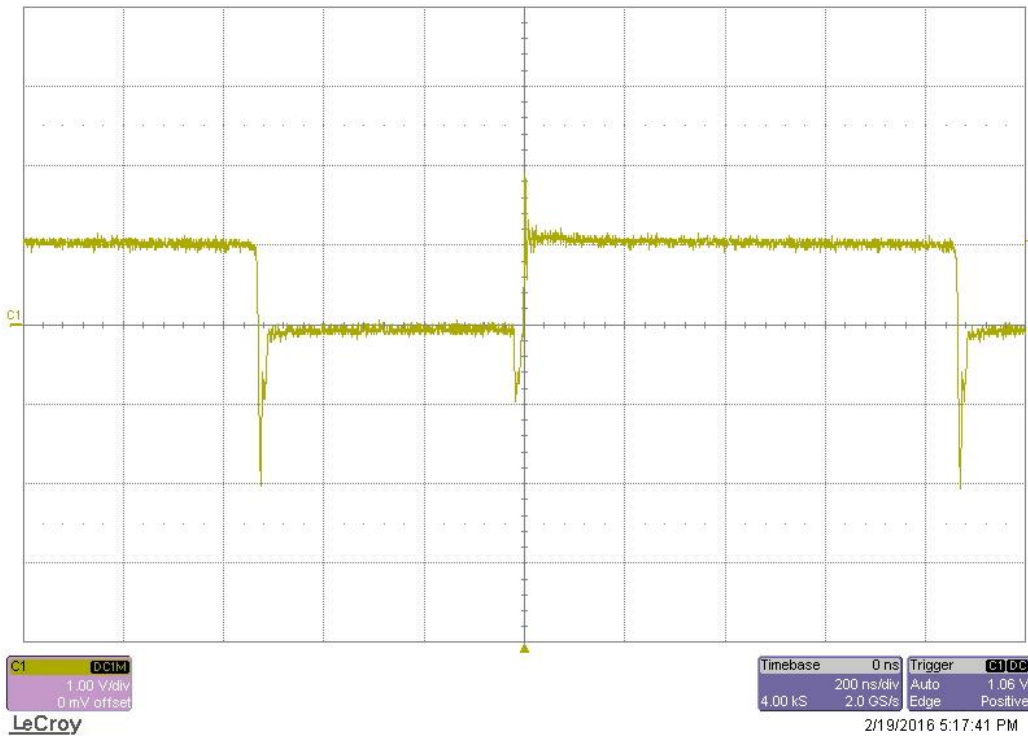


7 Loop Response, Full Load


7.1 TPS548D22: 5V@10A

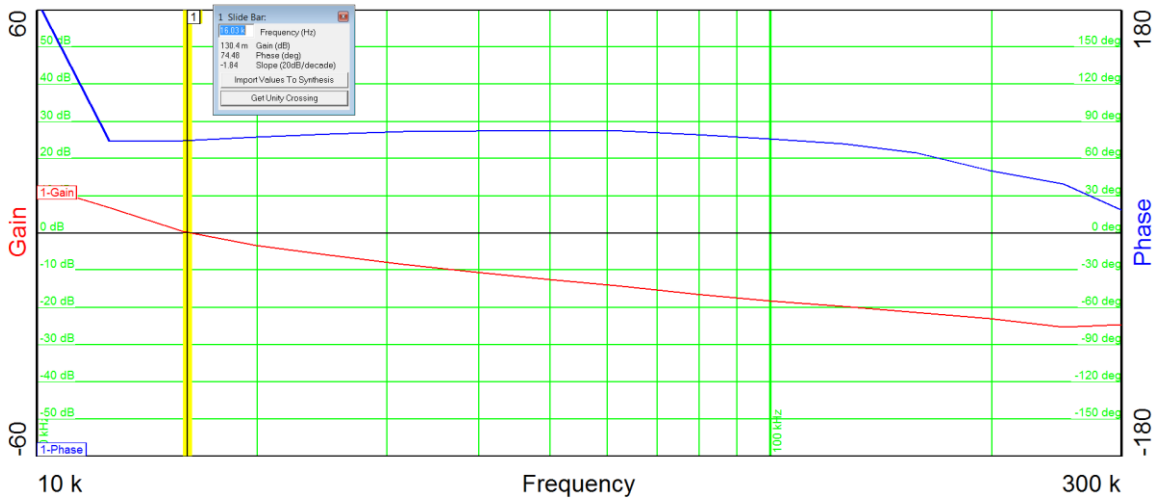


7.2 TPS549A20: 3.3V@14A

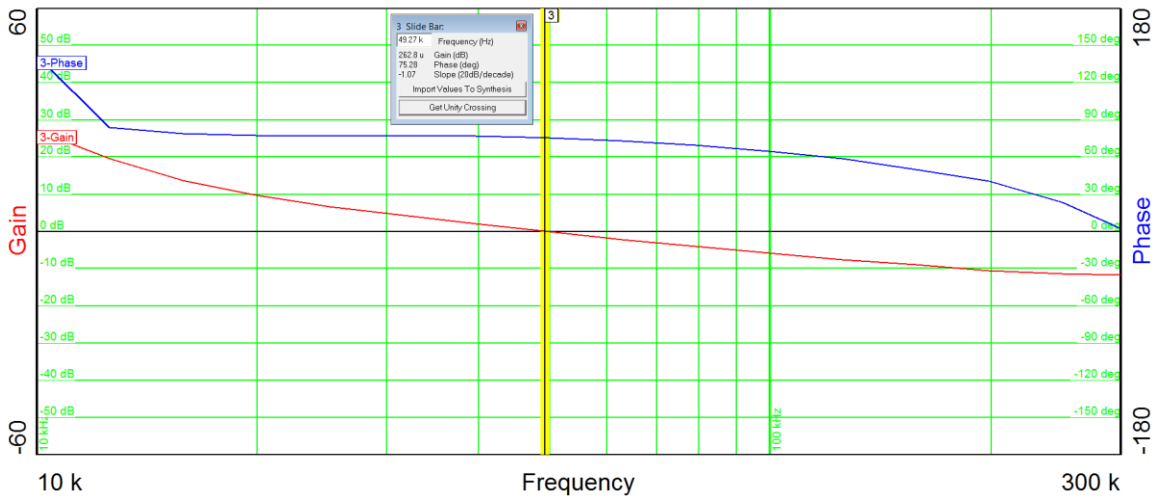


7.3 TPS53513: 1.5V@8A

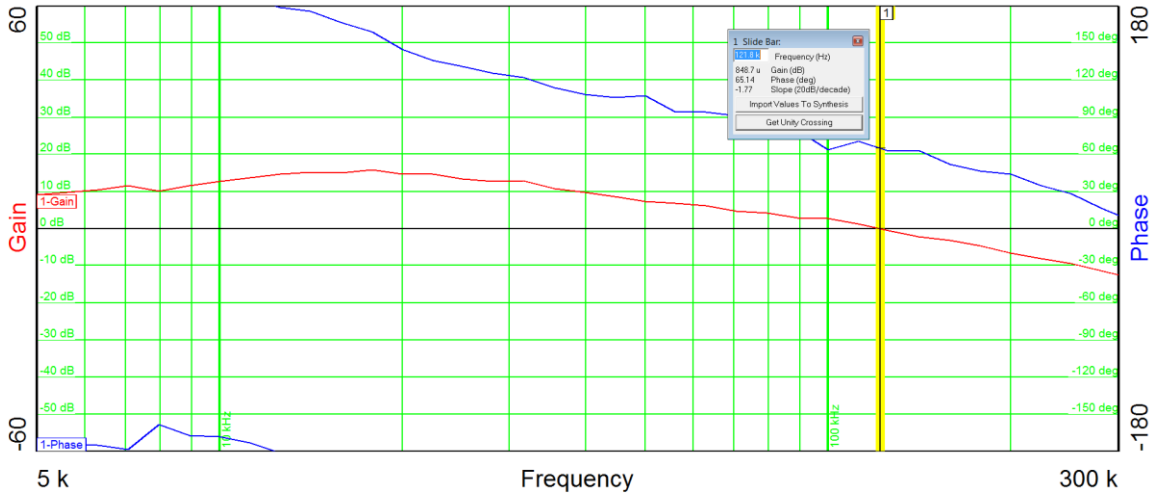


7.4 TPS53515: 1.2V@12A

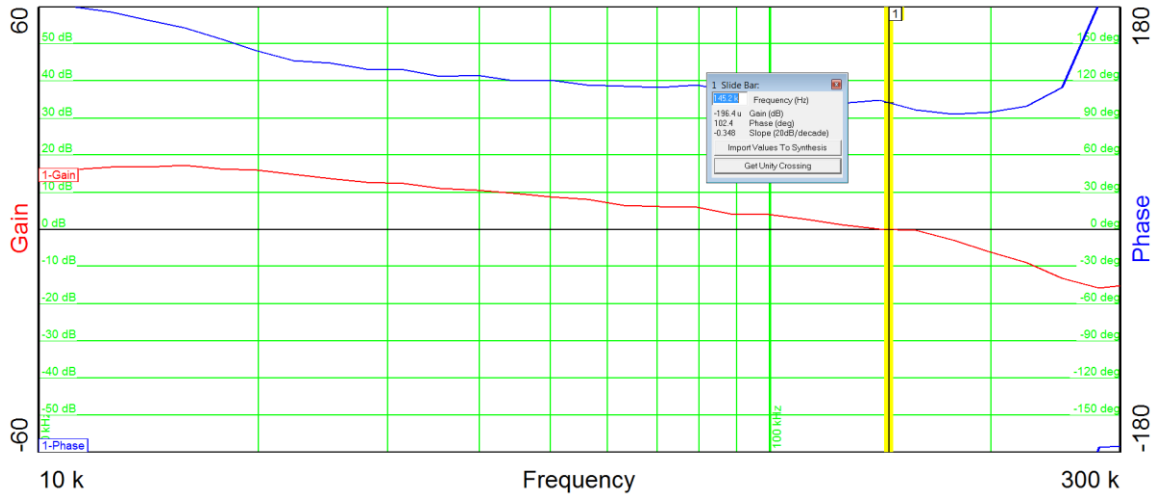


7.5 TPS544C25: 1V@15A

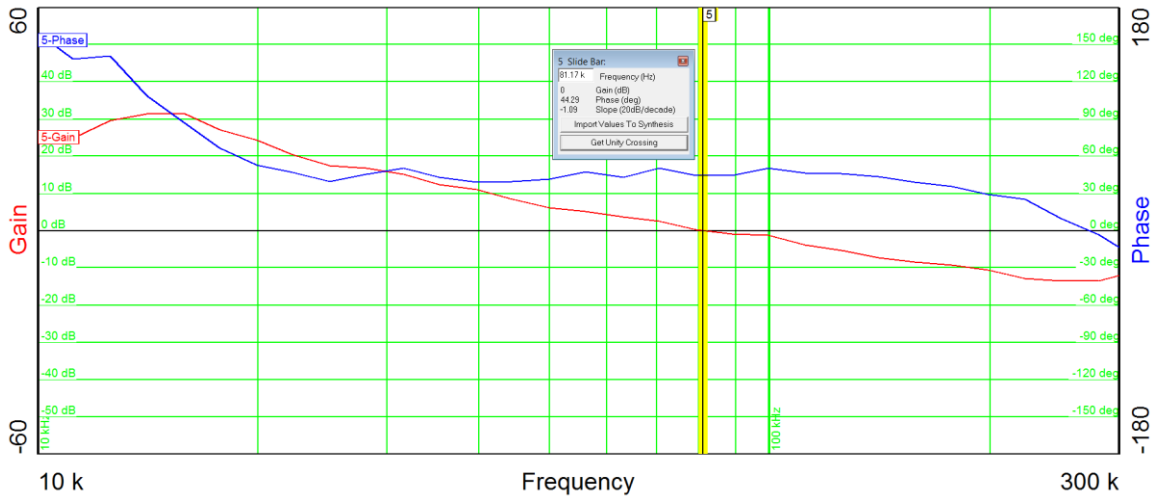

7.6 TPS544C25: 0.85V@15A

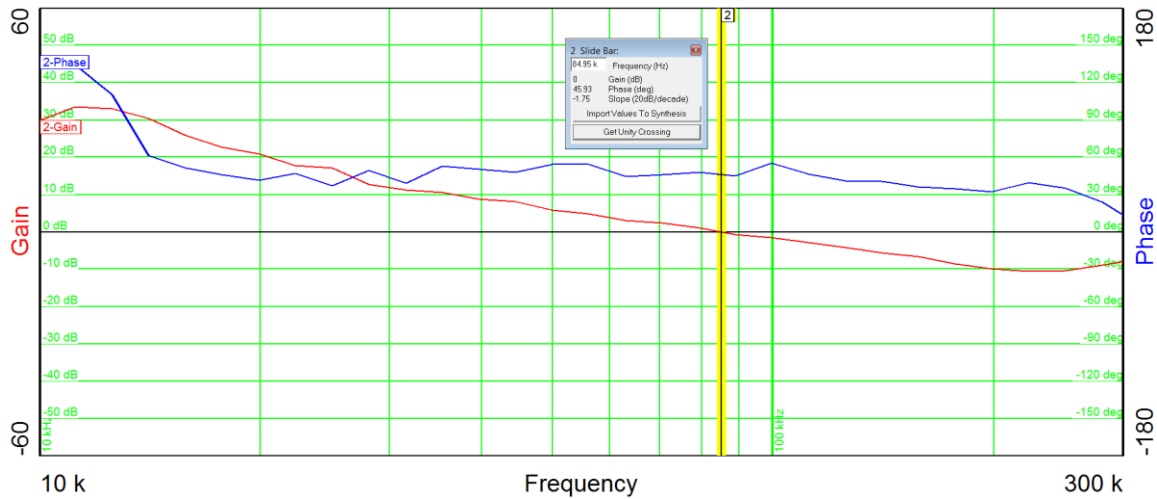


7.7 TPS53317: 0.6V@6A

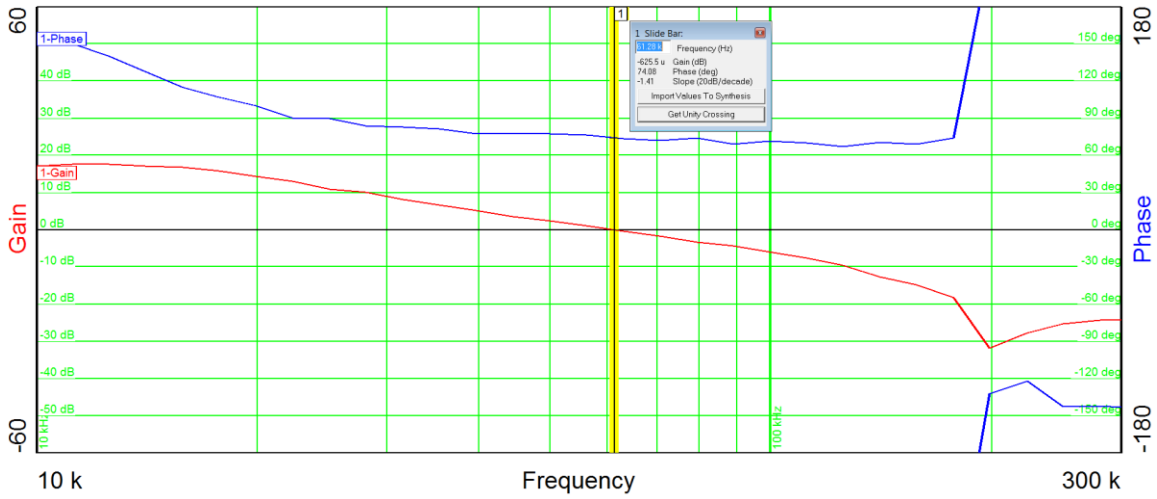

8 Photo


The photo below shows the PMP11399 board.

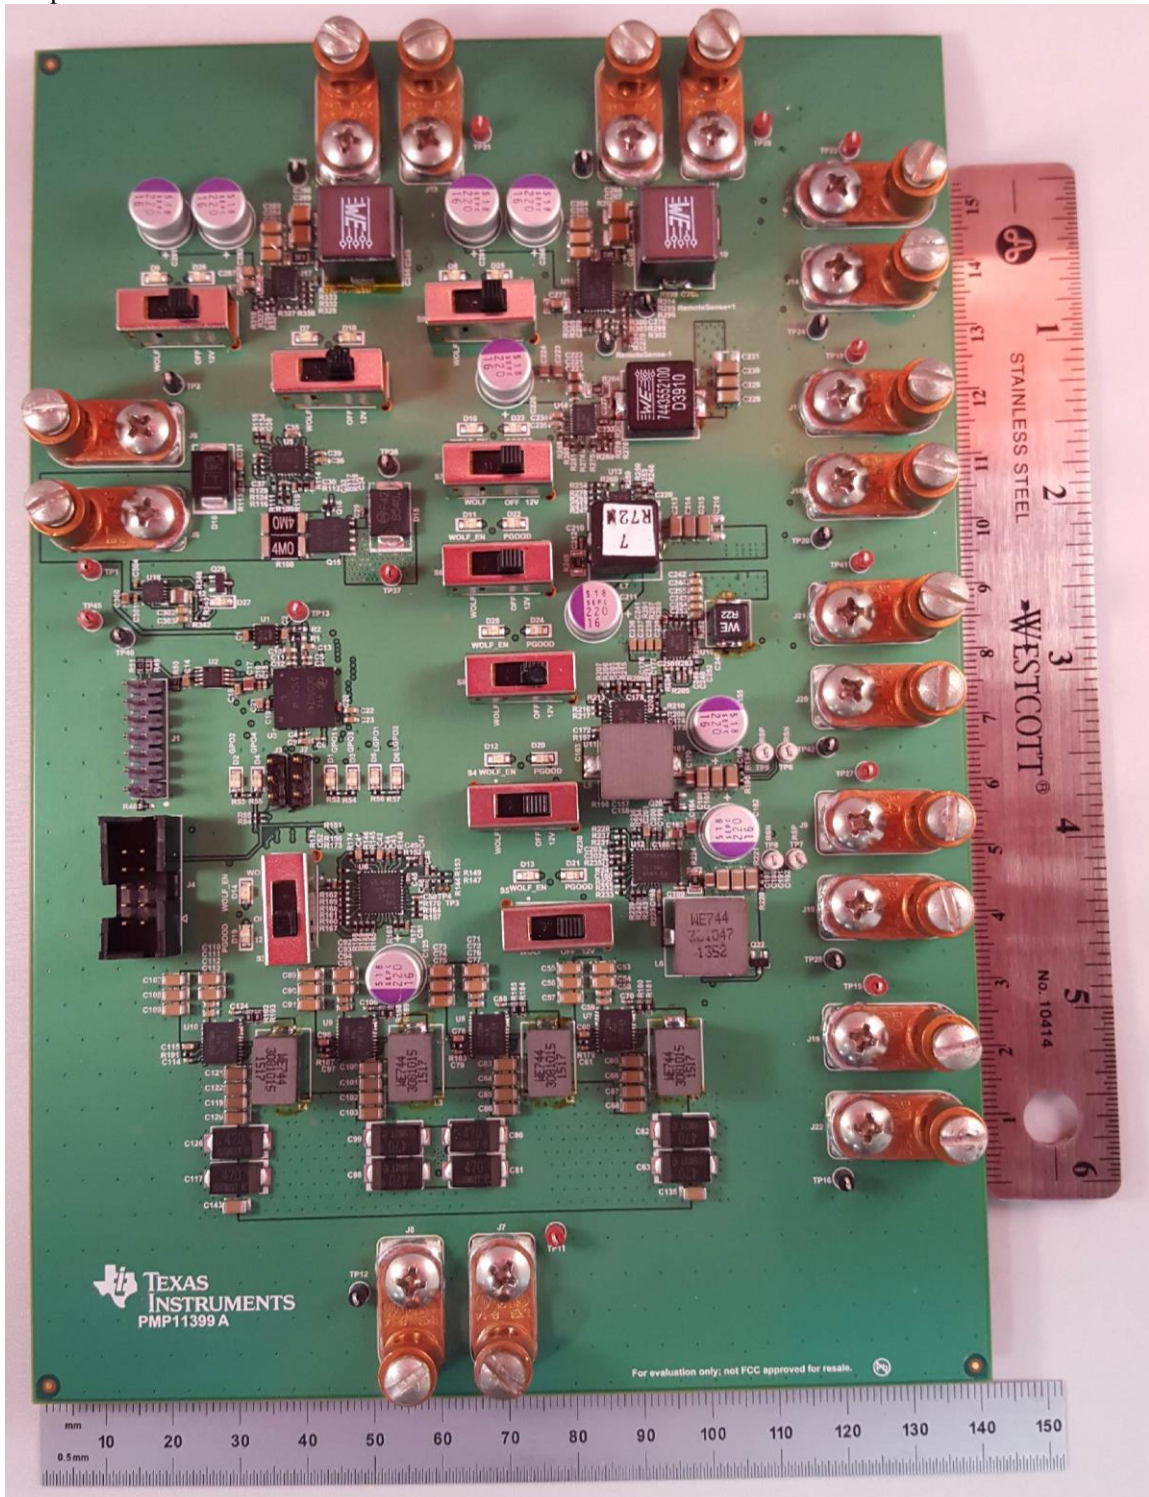


9 Thermal Images, Full Load

The measurements below were taken with rails individually fully loaded at room temperature, with airflow.


9.1 TPS548D22: 5V@10A

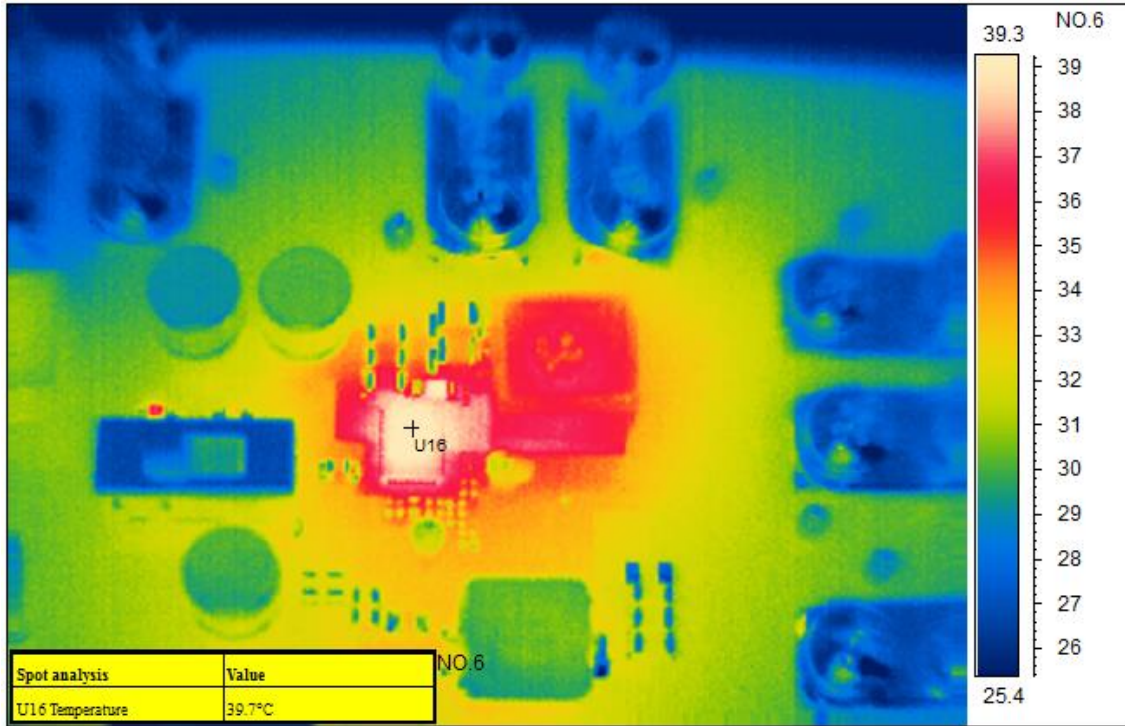


9.2 TPS549A20: 3.3V@14A

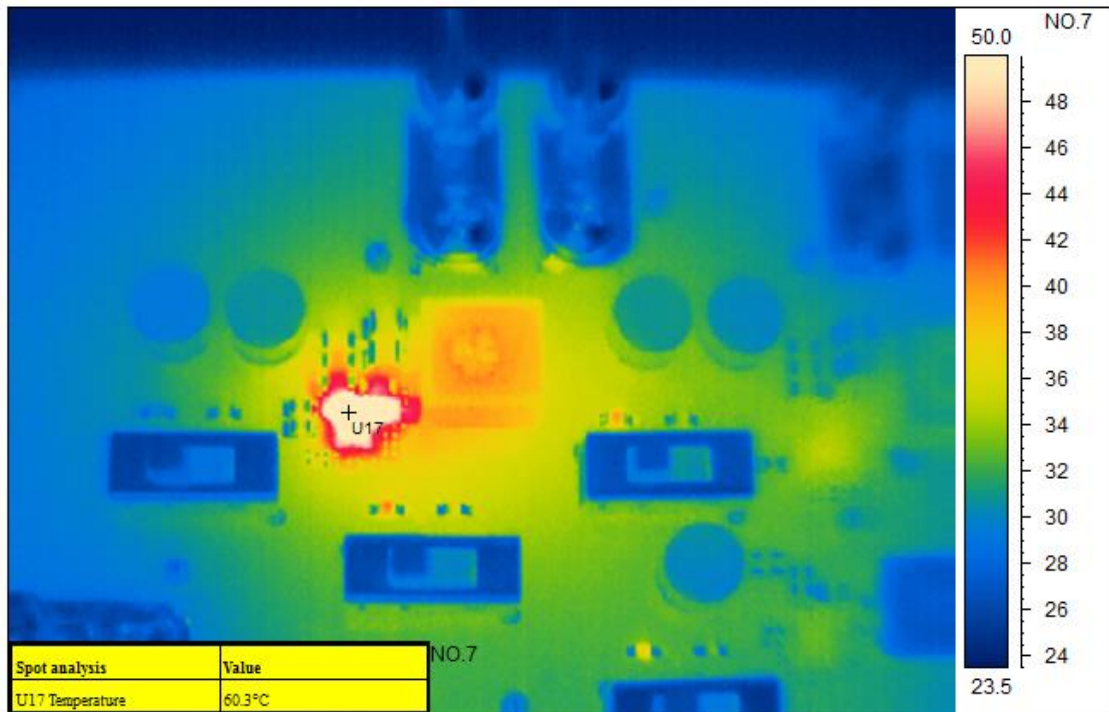


9.3 TPS53513: 1.5V@8A

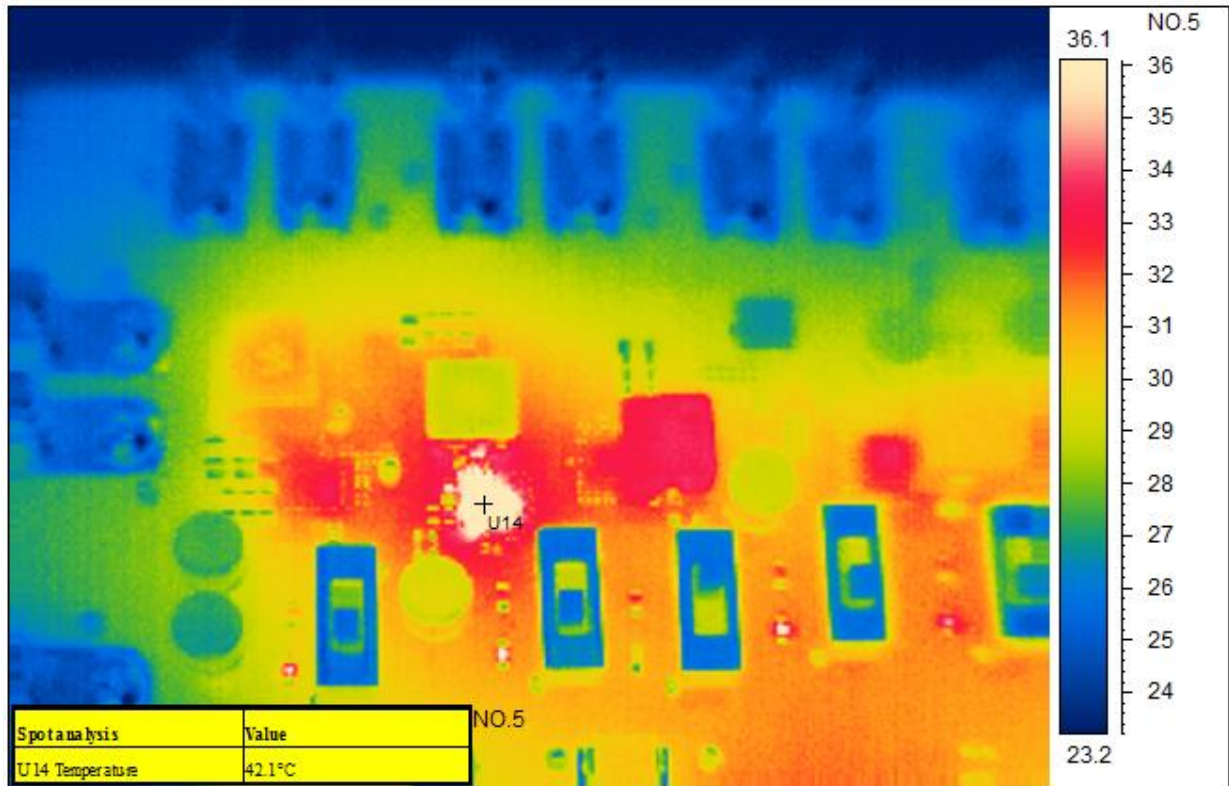


9.4 TPS53515: 1.2V@12A

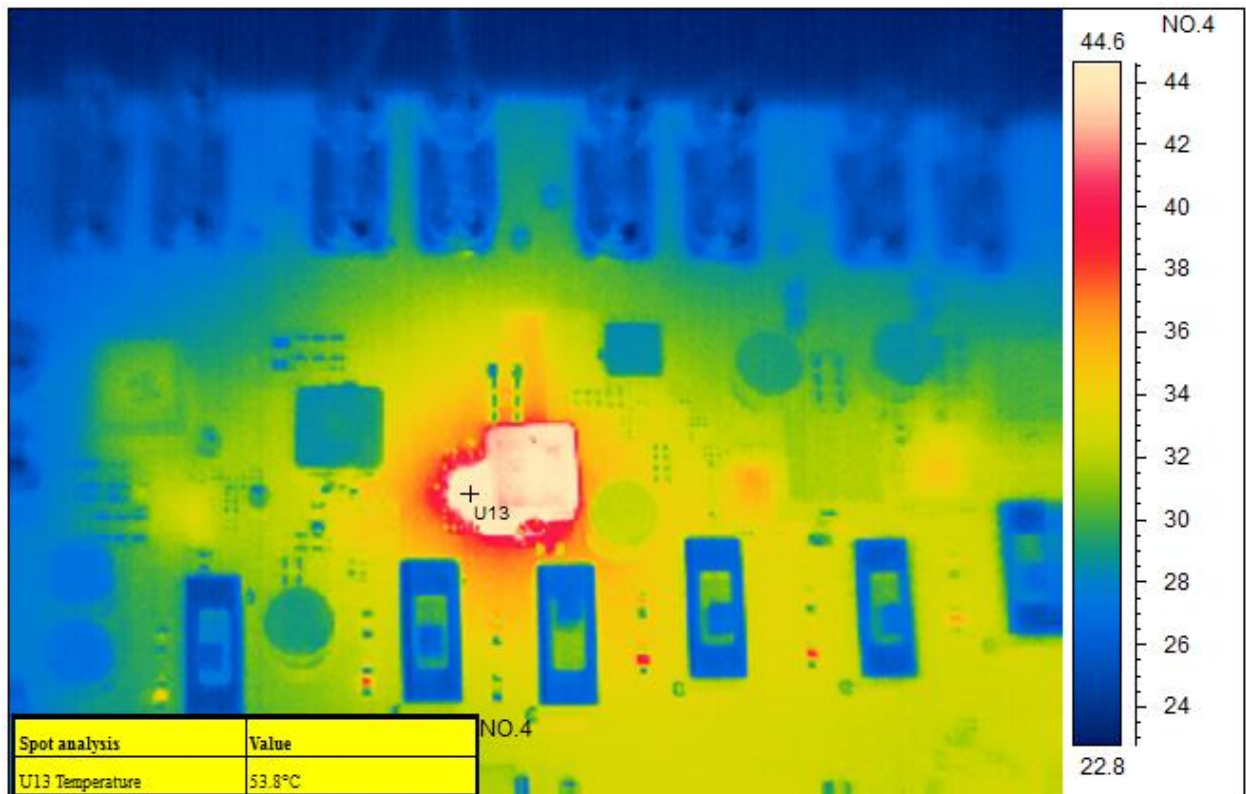


9.5 TPS544C25: 1V@15A

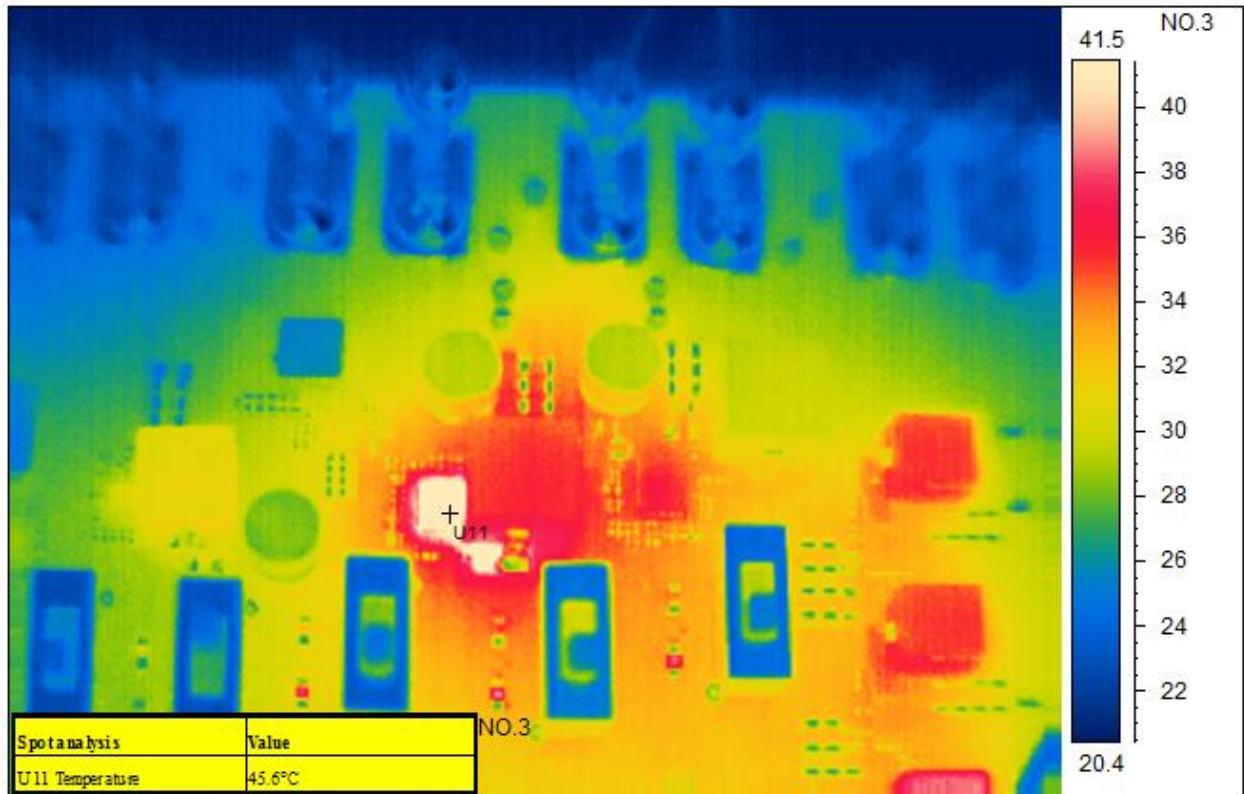


9.6 TPS544C25: 0.85V@15A

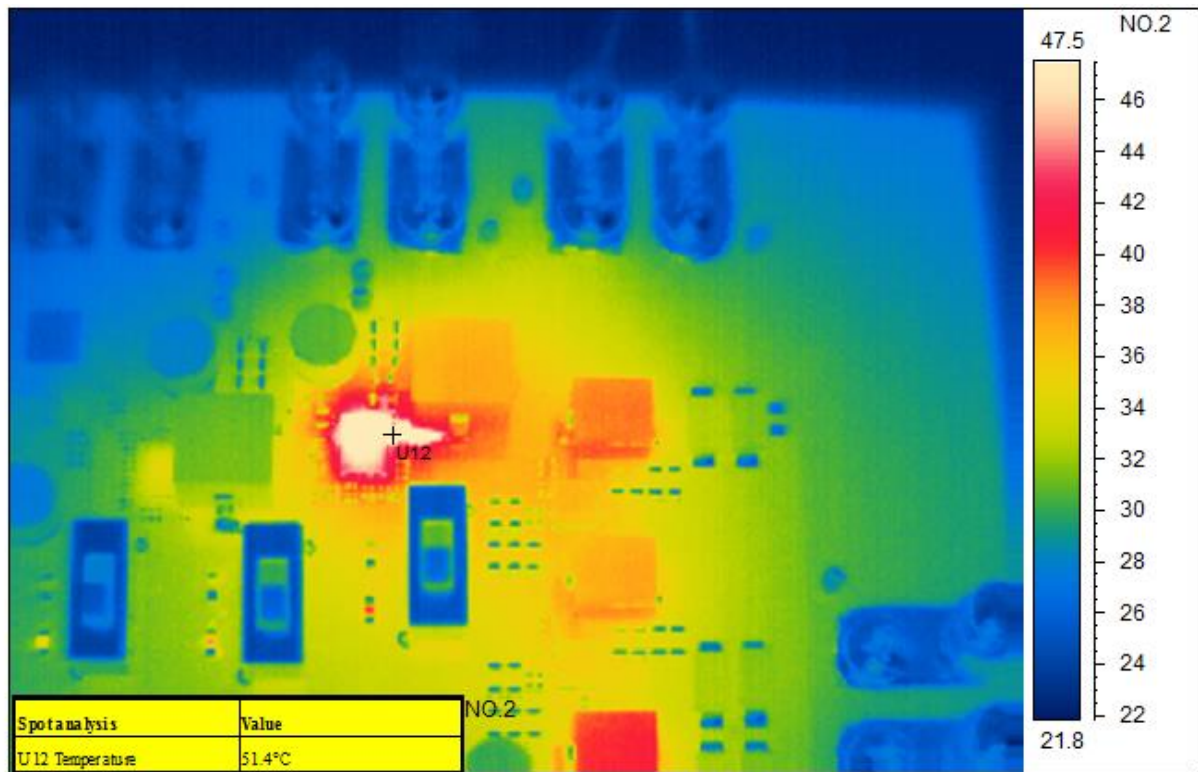

9.7 TPS53647: 1V@30A (V_{CO}RE)

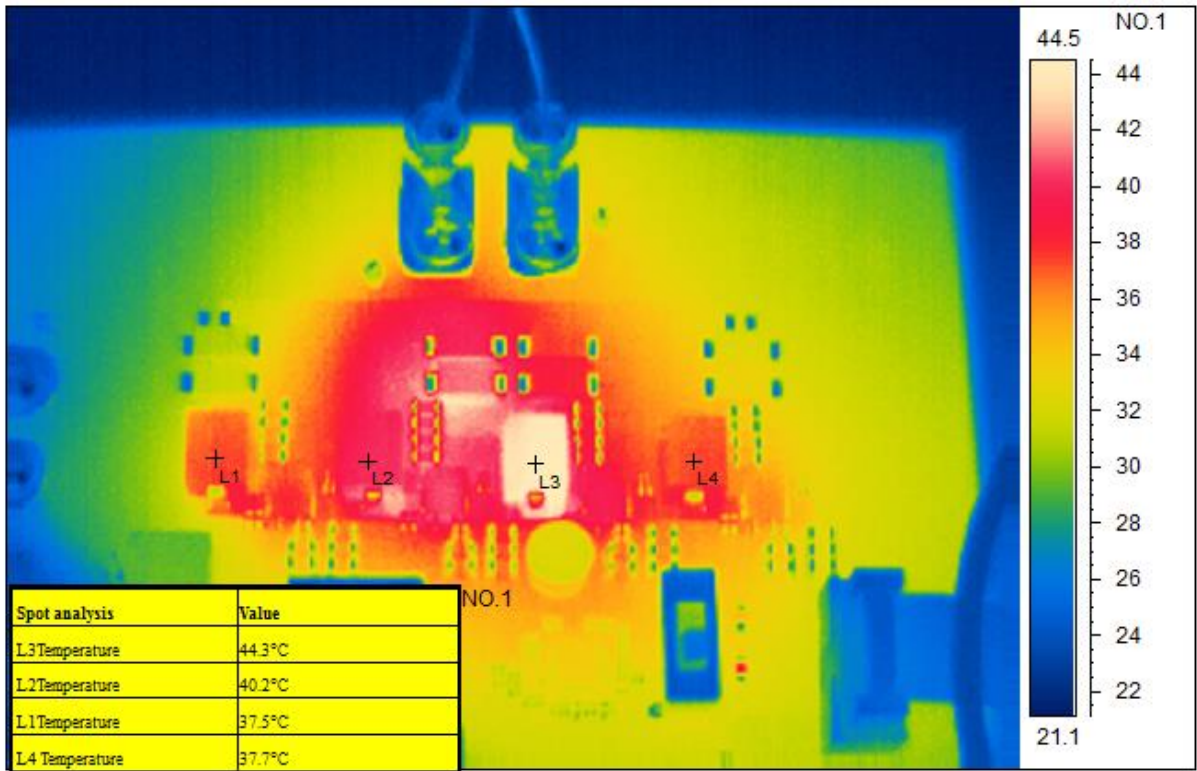

9.8 TPS53317: 0.6V@6A

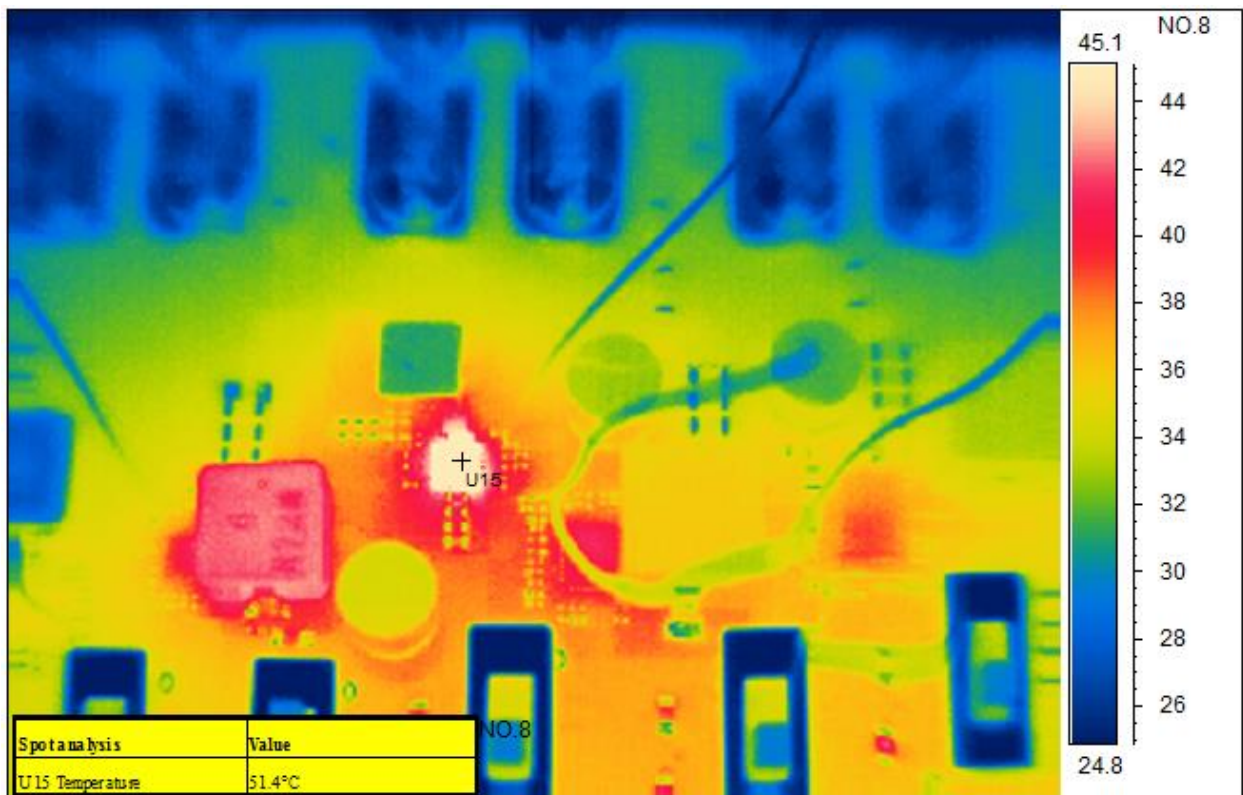

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated